


| | | | |
|-----------|---------|----------|------|
| LOC I-SPI | APP CRS | Rwy Idg | 7927 |
| 109.5 | 043° | TDZE | 592 |
| | | Apt Elev | 598 |

ILS or LOC RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

| | | | | | | | |
|--|-----------------------|---------------------|-------------|----------|--------|---|--|
| ADF Required. | | | | MALSR | | MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold. | |
| When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1½ SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting). | | | | | | | |
| ATIS | SPRINGFIELD APP CON * | SPRINGFIELD TOWER * | GND CON | CLNC DEL | UNICOM | | |
| 127.65 270.1 | 126.15 323.0 | 121.3 (CTAF) 257.8 | 121.9 348.6 | 121.7 | 122.95 | | |

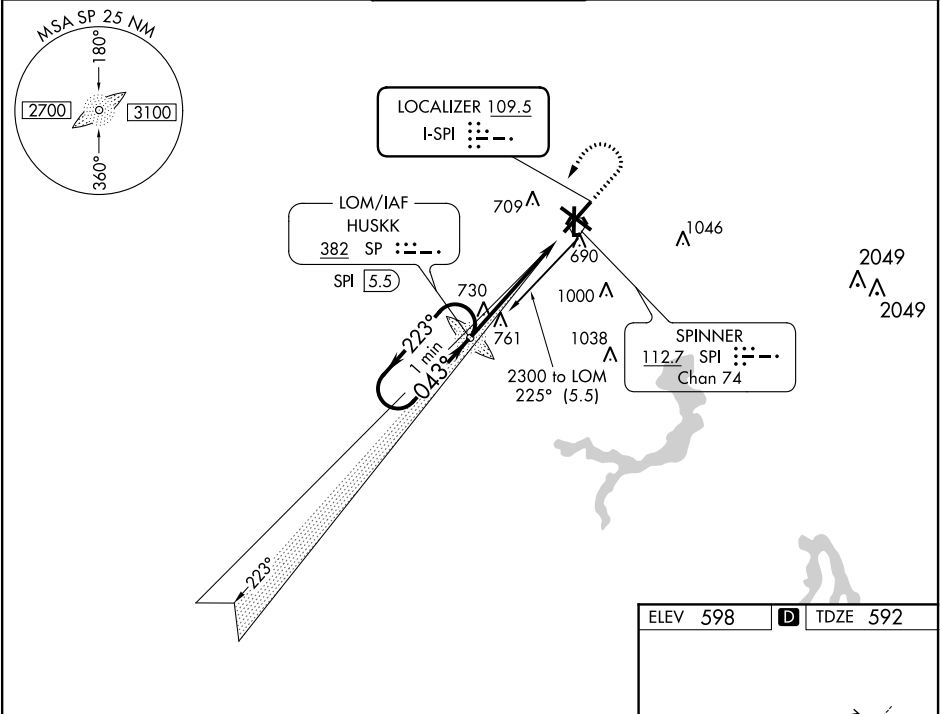

| | | | | | |
|----------------------------|-----------------------|-----------------------|-------------------------|-------------------------|--------|
| One Minute Holding Pattern | | SP LOM SPI 5.5 | 1500 ↑ | 2300 ↷ | SP |
| | | 2297 | | | |
| GS 3.00° TCH 56 | | 2300 | 043° | | |
| CATEGORY | A | B | C | D | |
| S-ILS 4 | * 792/24 200 (200-½) | | | | |
| S-LOC 4 | 1020/24 428 (500-½) | | 1020/40 428 (500-¾) | | |
| CIRCLING | 1040-1 442 (500-1) | 1100-1 502 (600-1) | 1360-2¼ 762 (800-2¼) | 1380-2½ 782 (800-2½) | |

