

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>69217</b><br><b>W04A</b> | APP CRS<br><b>044°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7701</b><br><b>889</b><br><b>913</b> |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 4



CHIPPEWA VALLEY RGNL (EAU)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl-Carl's Field altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl-Carl's Field altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ¾ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:  
Climb to 3000 direct IROKE and hold.

|                        |  |  |                           |                         |
|------------------------|--|--|---------------------------|-------------------------|
| ATIS<br><b>126.025</b> | MINNEAPOLIS CENTER<br><b>125.3 335.6</b> | EAU CLAIRE TOWER★<br><b>118.575 (CTAF) 0</b> | GND CON<br><b>120.925</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|--|---------------------------|-------------------------|

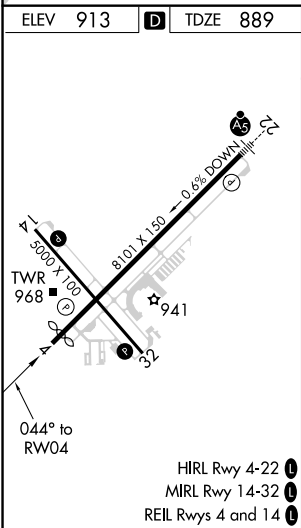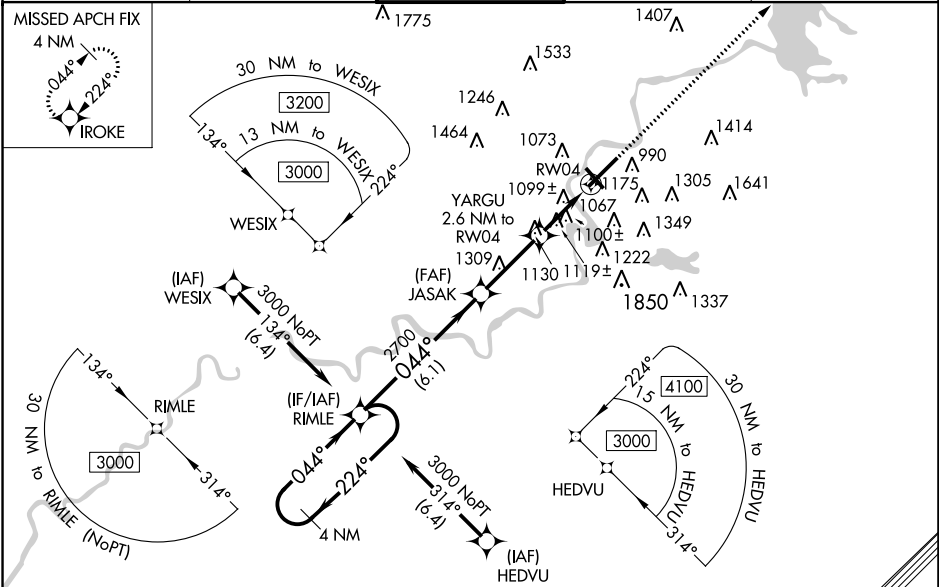

|                                 |                       |                       |                         |                         |
|---------------------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| ELEV 913 <b>D</b> TDZE 889      |                       |                       |                         |                         |
| 4 NM Holding Pattern RIMLE      |                       |                       |                         |                         |
| 3000 ← 224° → 044° →            |                       |                       |                         |                         |
| GP 3.00° TCH 44                 |                       |                       |                         |                         |
| JASAK 2700 YARGU 2.6 NM to RW04 |                       |                       |                         |                         |
| *1.3 NM to RW04 *1740           |                       |                       |                         |                         |
| 6.1 NM 3 NM 1.3 NM 1.3 NM       |                       |                       |                         |                         |
| CATEGORY                        | A                     | B                     | C                       | D                       |
| LPV DA                          | 1089-¾ 200 (200-¾)    |                       |                         |                         |
| LNAV/VNAV DA                    | 1379-1½ 490 (500-1½)  |                       |                         |                         |
| LNAV MDA                        | 1360-1                | 471 (500-1)           | 1360-1¾                 | 471 (500-1¾)            |
| CIRCLING                        | 1480-1<br>567 (600-1) | 1540-1<br>627 (700-1) | 1660-2¼<br>747 (800-2¼) | 2200-3<br>1287 (1300-3) |