ILS or LOC RWY 4

SOUTHERN WISCONSIN RGNL (JVL)

LOC I-JVL	APP CRS	Rwy Idg	6701
109.1	044°	TDZE	806
		Apt Elev	808

Circling to Rwy 18 NA at night. When local altimeter setting not received, use Rockford altimeter setting and increase all DA 69 feet and all MDA 80 feet, increase S-LOC 4 Cats C/D and Circling Cat C visibility ½ mile, and Circling Cat D ¼ mile. For inoperative MALSR when using Rockford altimeter setting increase S-ILS 4 all Cats visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 3100 direct RFD VOR/DME and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
128.25	121.0 327.0	118.8(CTAF) L 225.4	121.65	121.65	122.95

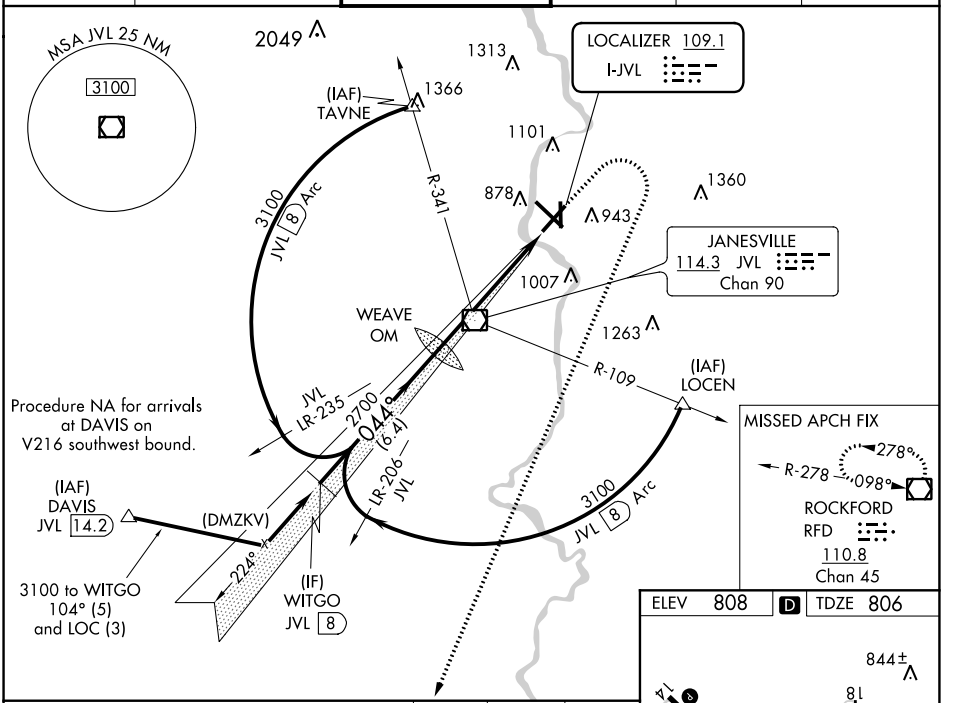

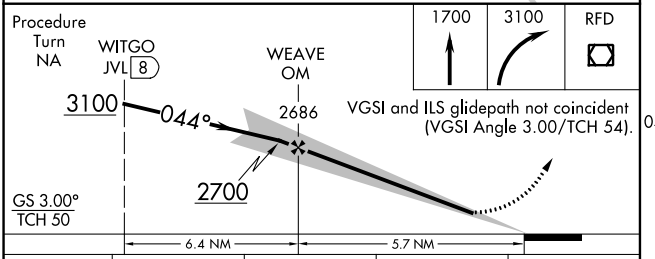

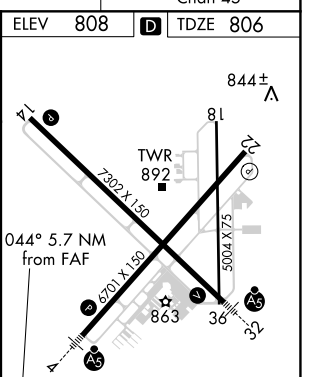

CATEGORY	A	B	C	D
S-ILS 4	1006-½ 200 (200-½)			
S-LOC 4	1400-½ 594 (600-½)		1400-1 594 (600-1)	1400-1¼ 594 (600-1¼)
CIRCLING	1400-1 592 (600-1)		1400-1½ 592 (600-1½)	1420-2 612 (700-2)

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

EC-3, 31 DEC 2020 to 28 JAN 2021
EC-3, 31 DEC 2020 to 28 JAN 2021