

APP CRS  
293°

Rwy Idg  
3198

TDZE  
604

Apt Elev  
604

RNAV (GPS) RWY 29

OCONTO-J DOUGLAS BAKE MUNI (OCQ)


▼

NA

Use Menominee altimeter setting; when not received, use Green Bay altimeter setting and increase all MDA 40 feet; increase LNAV/Circling Cat C visibility ¼ mile. Procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH:  
Climb to 3200 direct WOBEV and hold.

AWOS-3 120.925	MNM AWOS-3PT 109.6	GREEN BAY APP CON ★ 120.3 338.2	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------	------------------------------------	--------------------------

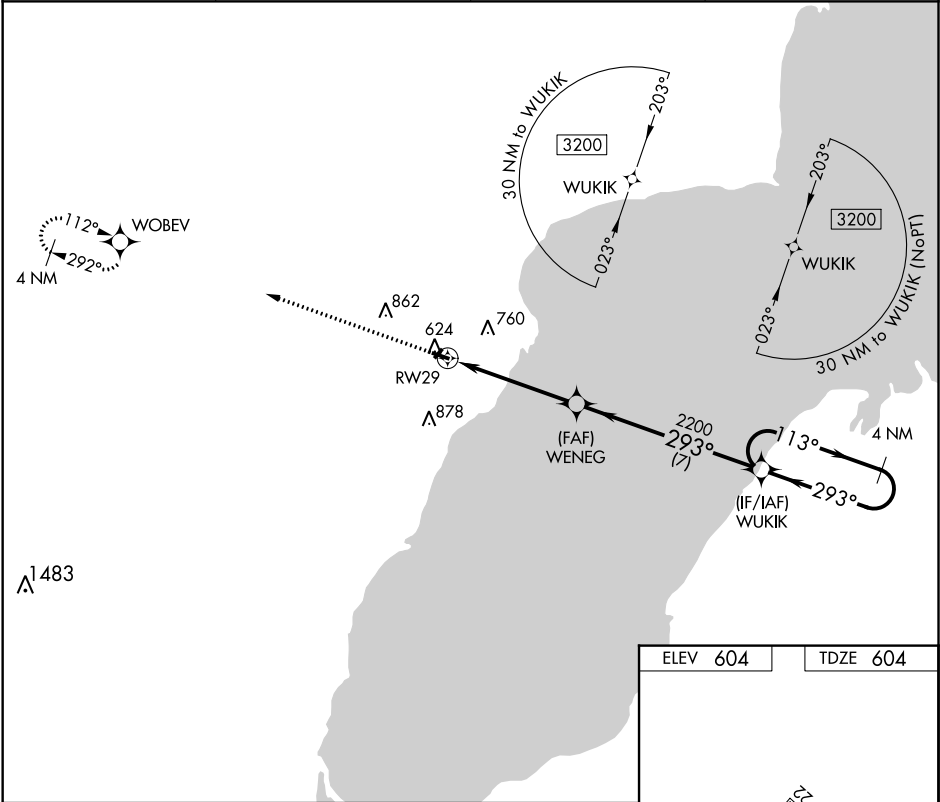

3200 WOBEV

WUKIK

4 NM Holding Pattern

WENEG

2200

3.00° TCH 40

4.9 NM

7 NM

CATEGORY	A	B	C	D
LNAV MDA	1120-1	516 (600-1)	1120-1⅓ 516 (600-1⅓)	NA
CIRCLING	1120-1 516 (600-1)	1160-1 556 (600-1)	1240-1¼ 636 (700-1¼)	NA

ELEV 604

TDZE 604

REIL Rwy 11 and 29

MIRL Rwy 11-29 0