



VOR/DME PNT	APP CRS	Rwy Idg	5000
109.6	217°	TDZE	666
Chan 33		Apt Elev	666

VOR RWY 24
PONTIAC MUNI (PNT)

When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase all MDA 100 feet, increase S-24 and Circling Cat C visibility ½ mile, and JUDUS fix minimums S-24 and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct PNT VOR/DME and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
-------------------	--------------------------------	----------------------------

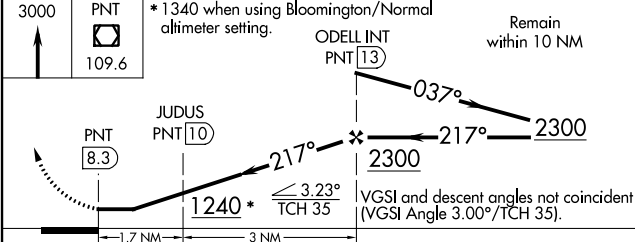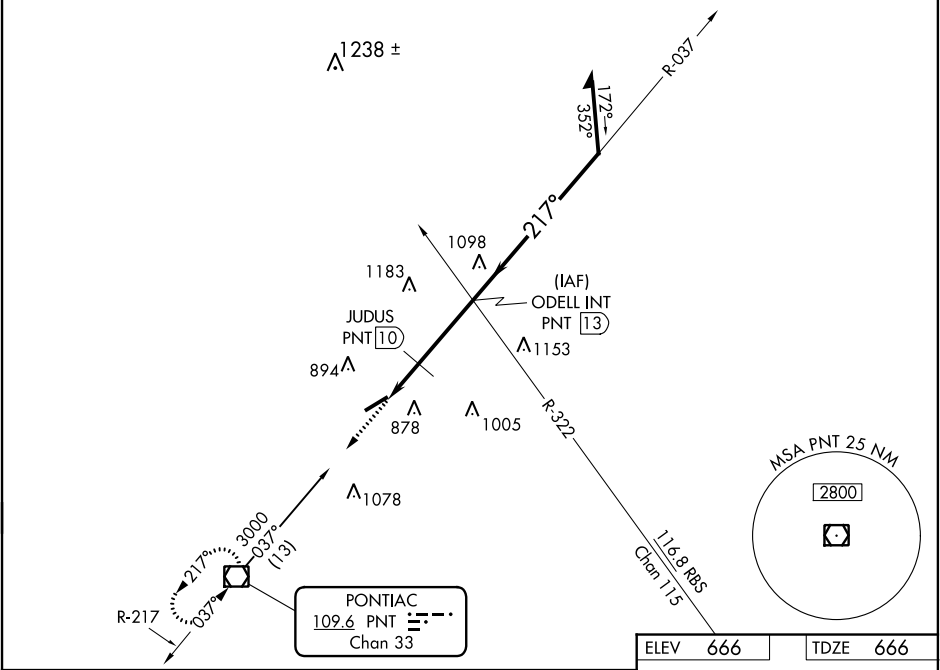

CATEGORY	A	B	C	D
S-24	1240-1 574 (600-1)		1240-1½ 574 (600-1½)	NA
CIRCLING	1240-1 574 (600-1)		1240-1½ 574 (600-1½)	NA
JUDUS FIX MINIMUMS				
S-24	1140-1 474 (500-1)		1140-1¼ 474 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)		1220-1½ 554 (600-1½)	NA

