

| | | |
|--|------------------------|---|
| WAAS CH 77900 W13A | APP CRS 130° | Rwy Idg TDZE 1301 Apt Elev 1304 |
|--|------------------------|---|

RNAV (GPS) RWY 13

MITCHELL MUNI (MHE)

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Huron Rgnl altimeter setting.

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

| | | |
|------------------------|---|---------------------------------|
| ASOS 124.175 | MINNEAPOLIS CENTER 126.25 339.8 | UNICOM 122.8 (CTAF) 0 |
|------------------------|---|---------------------------------|

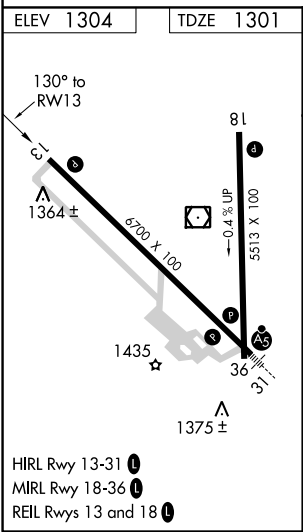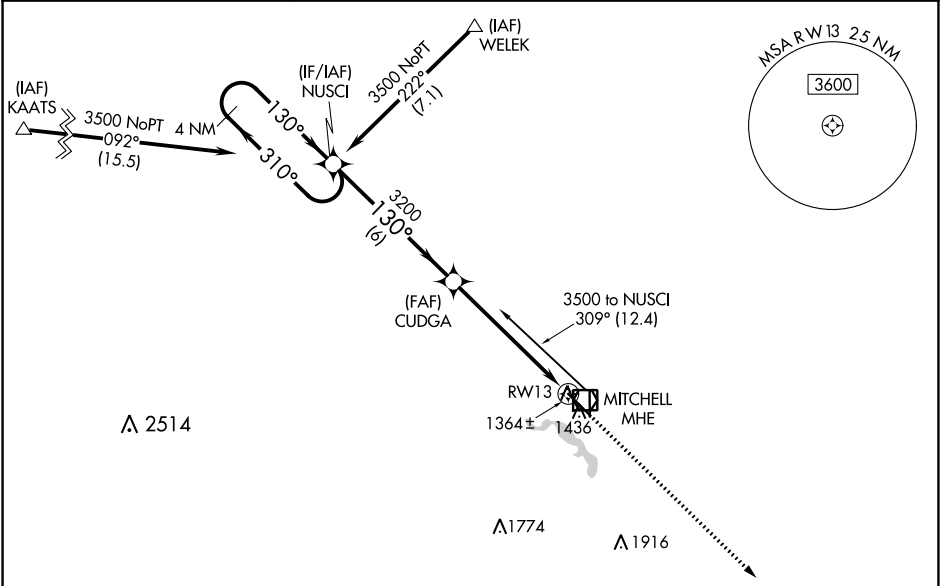

| | | | | |
|----------------------|-------------------------|-------------------------|-------------------------|-----------------------|
| 4 NM Holding Pattern | | | | |
| NUSCI | | | | |
| CUDGA | | | | |
| JUTUB | | | | |
| GP 3.00° TCH 46 | | | | |
| 6 NM 4.8 NM 0.9 | | | | |
| CATEGORY | A | B | C | D |
| LPV DA | 1575-1 274 (300-1) | | | |
| LNAV/VNAV DA | 1627-1¼ 326 (400-1¼) | | | |
| LNAV MDA | 1620-1 319 (400-1) | | | |
| CIRCLING | 1740-1¼ 436 (500-1¼) | 1760-1¼ 456 (500-1¼) | 1820-1½ 516 (600-1½) | 1860-2 556 (600-2) |

NC-1, 31 DEC 2020 to 28 JAN 2021

NC-1, 31 DEC 2020 to 28 JAN 2021