

WAAS  
CH **49210**  
**W14A**

APP CRS  
**138°**

Rwy Idg  
TDZE  
Apt Elev

**4000**  
**1039**  
**1039**

**RNAV (GPS) RWY 14**  
BENSON MUNI (BBB)

RNP APCH.  



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Appleton altimeter setting. When local altimeter setting not received, use Appleton altimeter setting and increase all DA and MDA 40 feet.

MISSED APPROACH: Climb to 2700 direct FETUD and hold.

AWOS-3 <b>118.45</b>	MINNEAPOLIS CENTER <b>125.5 323.1</b>	UNICOM <b>122.8 (CTAF) 0</b>
-------------------------	--	---------------------------------

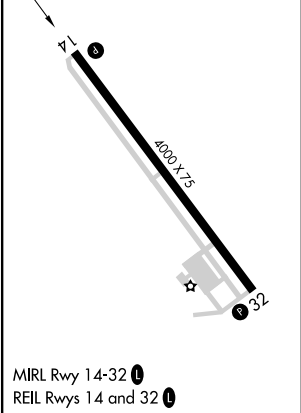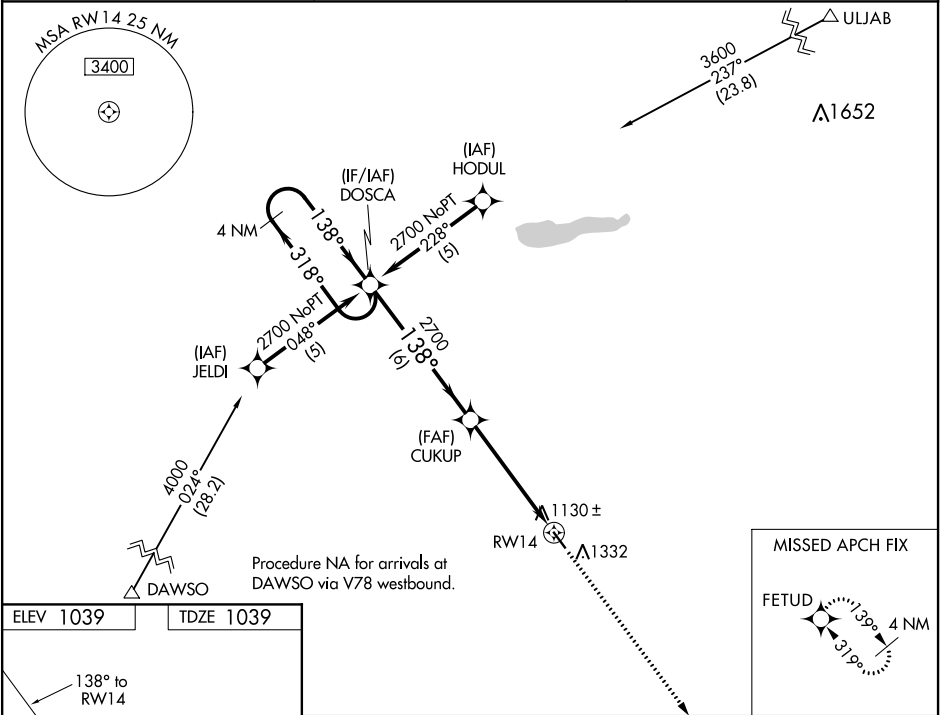

DOSCA		CUKUP		2700	FETUD
4 NM Holding Pattern				↑	✧
2700 ← 318°		138° →		* 1.5 NM to RWY 14	
138° →		2700		RWY 14	
GP 3.00°				* LNAV only	
TCH 40					
		6 NM		3.5 NM	
				1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	1382-1¼	343 (400-1¼)	NA		
LNAV/VNAV DA	1426-1½	387 (400-1½)	NA		
LNAV MDA	1540-1	501 (600-1)	NA		