

WAAS CH <b>86532</b> <b>W33A</b>	APP CRS <b>332°</b>	Rwy Idg TDZE <b>1125</b> Apt Elev <b>1127</b>
--	------------------------	---

RNAV (GPS) RWY 33


WASECA MUNI (ACQ)

⚠

When local altimeter setting not received, use Owatonna altimeter setting and increase all MDAs 40 feet, increase LP and LNAV Cat C visibility 1/8 mile and Circling Cat C visibility 1/8 mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct WITUD and hold.

AWOS-3 <b>118.425</b>	MINNEAPOLIS CENTER <b>135.0 306.9</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	--	---------------------------------

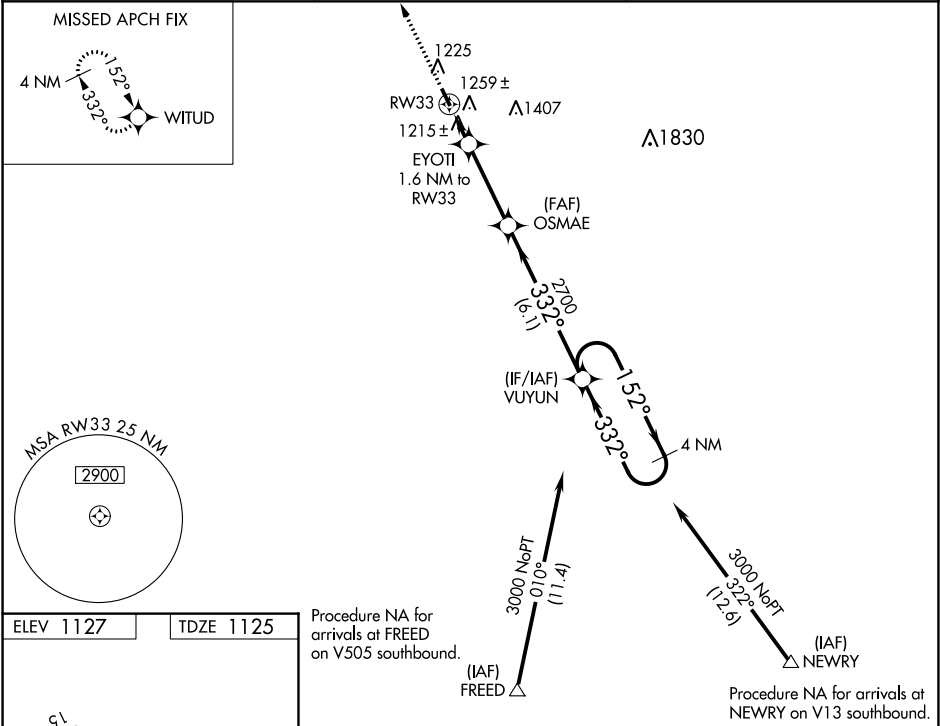

3000 WITUD		Visual Segment - Obstacles		VUYUN 4 NM Holding Pattern	
CATEGORY	A	B	C	D	
LP MDA	1480-1		355 (400-1)		NA
LNAV MDA	1520-1		395 (400-1 1/8)		NA
CIRCLING	1560-1 433 (500-1)		1760-1 1/2 633 (700-1 1/2)		NA