

WAAS CH 70633 W34A	APP CRS 339°	Rwy ldg TDZE Apt Elev	4007 1364 1368
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34



WADENA MUNI (ADC)

⚠

DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Staples altimeter setting. When local altimeter setting not received, use Staples altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LNAV/VNAV visibility 1/8 mile, LNAV Cat C visibility 1/4 mile and Circling Cat C visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (1°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 3300 direct WENVI and hold.

AWOS-3 128.325	MINNEAPOLIS CENTER 126.1 269.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

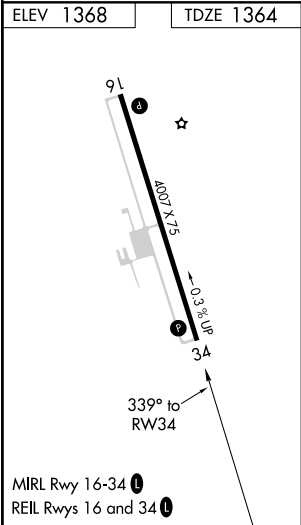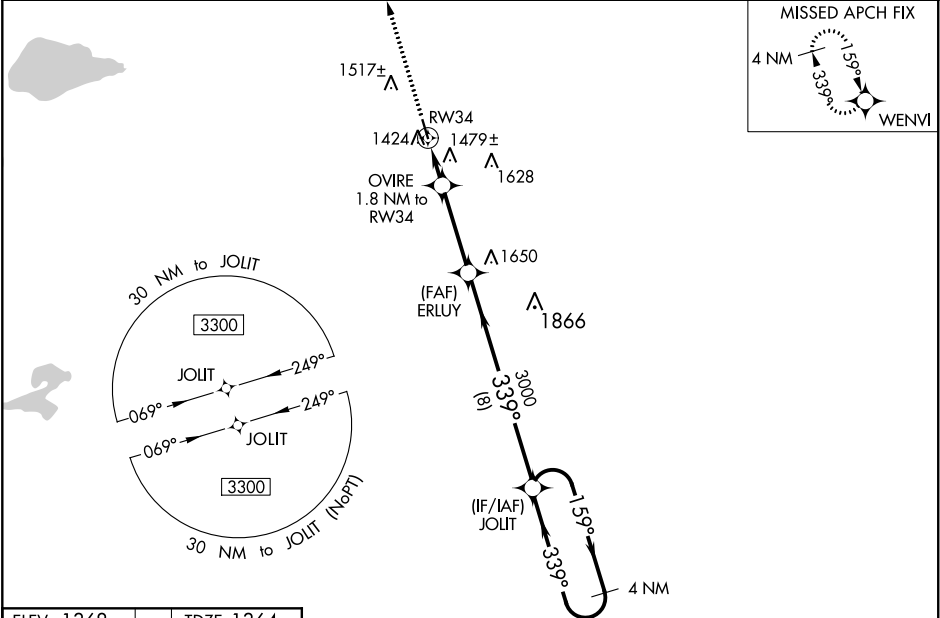

3300	WENVI	4 NM Holding Pattern			
↑	✦				
* LNAV only		OVIRE 1.8 NM to RW34	ERLUY 3000	JOLIT	
		*1.1 NM to RW34	339°	159°	3300
RW34		1960*	3000	GP 3.00° TCH 42	
1.1 NM		0.7 NM	3.2 NM	8 NM	
CATEGORY	A	B	C	D	
LPV DA	1614-1 250 (300-1)			NA	
LNAV/ VNAV	DA	1791-1½ 427 (500-1½)			NA
LNAV MDA	1740-1	376 (400-1)	1740-1⅛ 376 (400-1⅛)		NA
CIRCLING	1780-1 412 (500-1)	1820-1 452 (500-1)	1940-1½ 572 (600-1½)		NA