
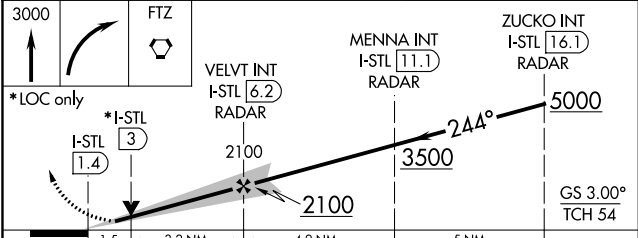
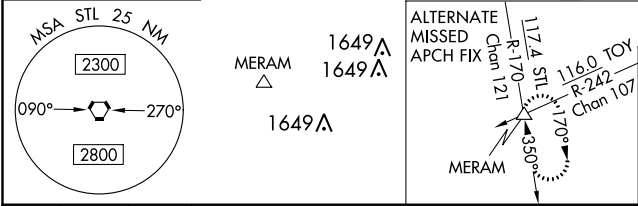
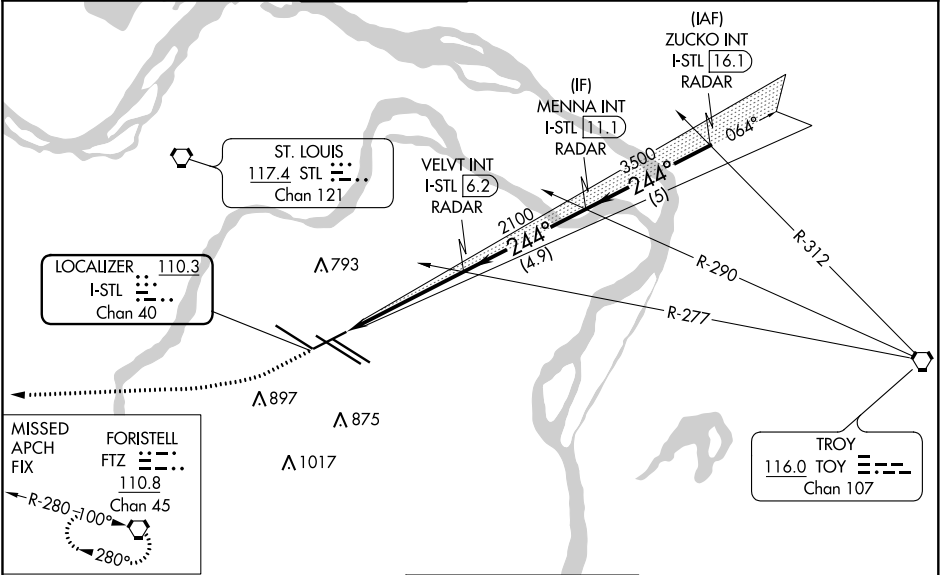



LOC/DME I-STL <b>110.3</b> Chan 40	APP CRS <b>244°</b>	Rwy Idg TDZE Apt Elev	<b>7602</b> <b>534</b> <b>618</b>
--	------------------------	-----------------------------	---

ILS or LOC RWY 24  
ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry.				MAL S 	MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.	
Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1% SM.						
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC



CATEGORY	A	B	C	D	E
S-ILS 24	734/40 200 (200-¾)				
S-LOC 24	1080/40	546 (500-¾)	1080-1⅓	546 (500-1⅓)	

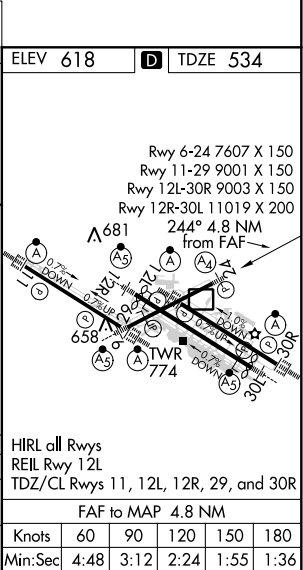

NC-3, 31 DEC 2020 to 28 JAN 2021

NC-3, 31 DEC 2020 to 28 JAN 2021