APP CRS	Rwy Idg	9501
094°	TDZE	1015
	Apt Elev	1026

RNAV (RNP) Z RWY 9

KANSAS CITY INTL (MCI)

For uncompensated Baro-VNAV systems, procedure NA below -20°C (-4°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.30 visibility to RVR 6000. GPS required.

MALSR

MISSED APPROACH: Climb to 4000 on track 094° to DUSTN and on track 092° to LYMES and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

RADAR REQUIRED

(IAF) JUDAA (RF REQD) 5000 141° (22.8)

STRAM 210K

(IF) TONYG 3600 142° (4.9) 3600 (5.9) SHOME 210K

5000 274° (6.5) (IF) INNEE 7000 (RF REQD)

MSA RW09 25 NM 3100

LADYD WOOKE

(IF) MAXEE 6000 5000 094° (3.1) 4000 094° (3.1) 3000 (2.1) JOOEE

(FAF) JAYBA 094° (4.8) RW09

3000 094° (3.1) 3000 (2.6) 2600 094° (1.3) GURRA 210K

1200 094° (6.4) DUSTN 092° (22.4)

3700 035° (4.9) 3700 (5.4)

5000 274° (5.3) (IF) MAMMA 7000 (RF REQD)

(IF) NOMEE SPANI 210K

1950

MISSED APCH FIX

LYMES 272° 092° 4 NM

5000 036° (24.7) (IAF) HOOZE (RF REQD)

ELEV 1026 D TDZE 1015

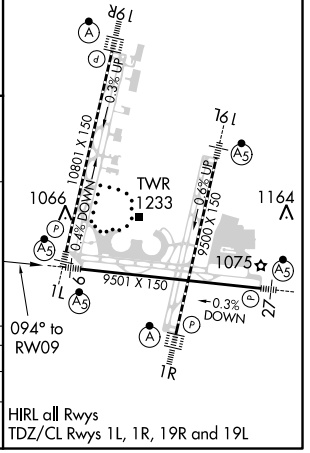

HIRL all Rwys
TDZ/CL Rwys 1L, 1R, 19R and 19L

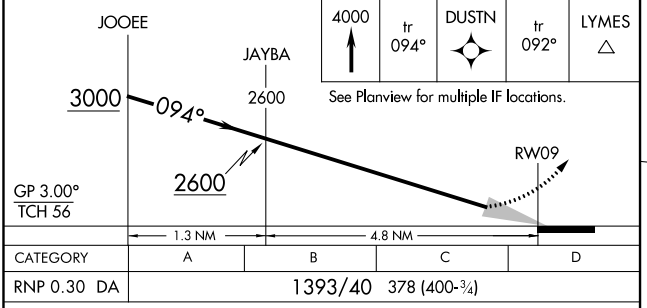

4000	tr 094°	DUSTN	tr 092°	LYMES

See Planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.30 DA	1393/40	378 (400-¾)		

AUTHORIZATION REQUIRED

NC-3, 31 DEC 2020 to 28 JAN 2021
NC-3, 31 DEC 2020 to 28 JAN 2021