

WAAS CH 62823 W21A	APP CRS 206°	Rwy Idg TDZE Apt Elev	5502 315 315
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

SIKESTON MEMORIAL MUNI (SIK)

RNP APCH.



▼

▲NA

Rwy 21 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Cape Girardeau altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Cape Girardeau altimeter setting and increase all DA 49 feet and all MDA 60 feet. Increase LNAV and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct CUXID and hold.

AWOS-3 119.175	MEMPHIS CENTER 133.65 292.15	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

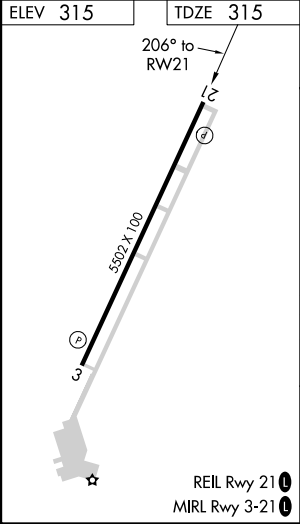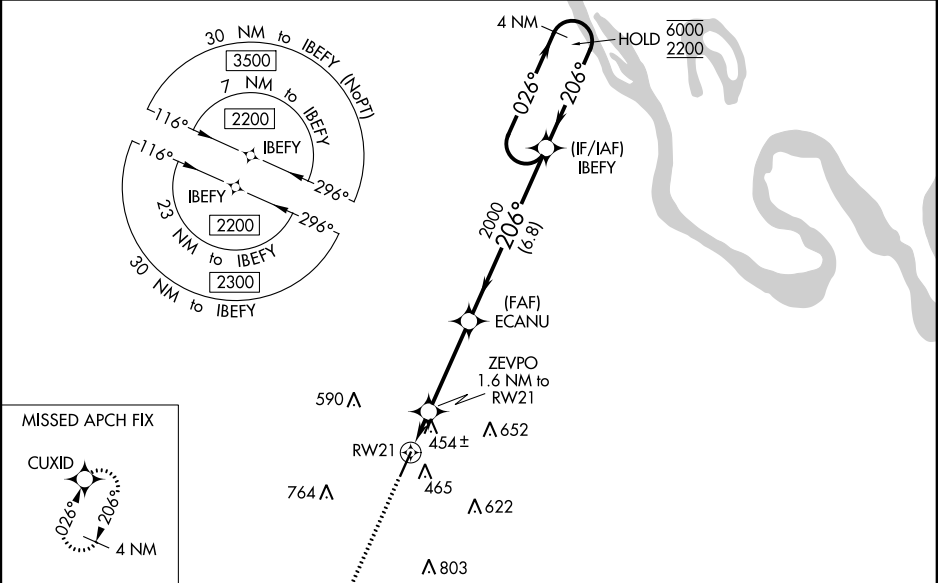

ELEV 315	TDZE 315
206° to RWY 21	
5502 x 100	
REIL Rwy 21 0	MIRL Rwy 3-21 0
CUXID	IBEFY
*LNAV only	ZEVPO 1.6 NM to RWY 21
860*	2000
1.6	3.6 NM
6.8 NM	
2000	2000
206°	206°
4 NM Holding Pattern	6000 2200
GP 3.00°	TCH 45
CATEGORY	A B C D
LPV DA	565-1 250 (300-1)
LNAV/VNAV DA	761-1 ¾ 446 (500-1 ¾)
LNAV MDA	720-1 405 (500-1) 720-1 ¾ 405 (500-1 ¾)
CIRCLING	840-1 525 (600-1) 860-1 545 (600-1) 1080-2 ¼ 765 (800-2 ¼) 1160-2 ¾ 845 (900-2 ¾)