

WAAS CH 77519 W04A	APP CRS 044°	Rwy Idg 11010 TDZE 13 Apt Elev 13
--	------------------------	--

RNAV (GPS) Y RWY 4L


JOHN F KENNEDY INTL (JFK)

RNP APCH.

▼ Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.

MISSED APPROACH: (Do not exceed 210K until BARJR) Climb to 3000 direct BARJR and track 067° to DUFFY and hold.

D-ATIS			NEW YORK APP CON			KENNEDY TOWER			GND CON		CLNC DEL		CPDLC
(ARR/DEP)	(ARR-NE)	(ARR-SW)				Rwys 4R/22L and 13L/31R	119.1	281.55	121.9	135.05			
128.725	117.7	115.4	128.125	269.0		Rwys 4L/22R and 13R/31L	123.9	281.55	348.6	348.6			

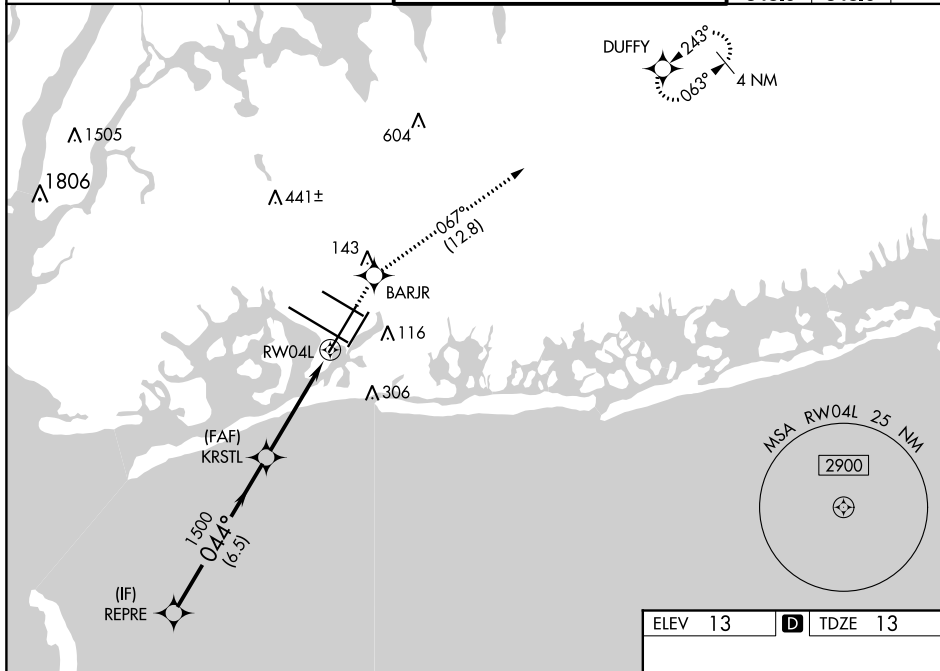

ELEV	13	D	TDZE	13
------	----	----------	------	----

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 75).

