


D-ATIS
128.725
CLNC DEL
135.05 348.6
CPDLC
NEW YORK DEP CON
135.9 353.75

TAKEOFF MINIMUMS:
Rwys 4L, 4R, 13L, 13R, 22L, 22R: NA - Noise Abatement.
Rwy 31R: Standard with minimum climb of 500' per NM to 3000.
Rwy 31L: Standard with minimum climb of 500' per NM to 3000.

(NARRATIVE ON FOLLOWING PAGE)

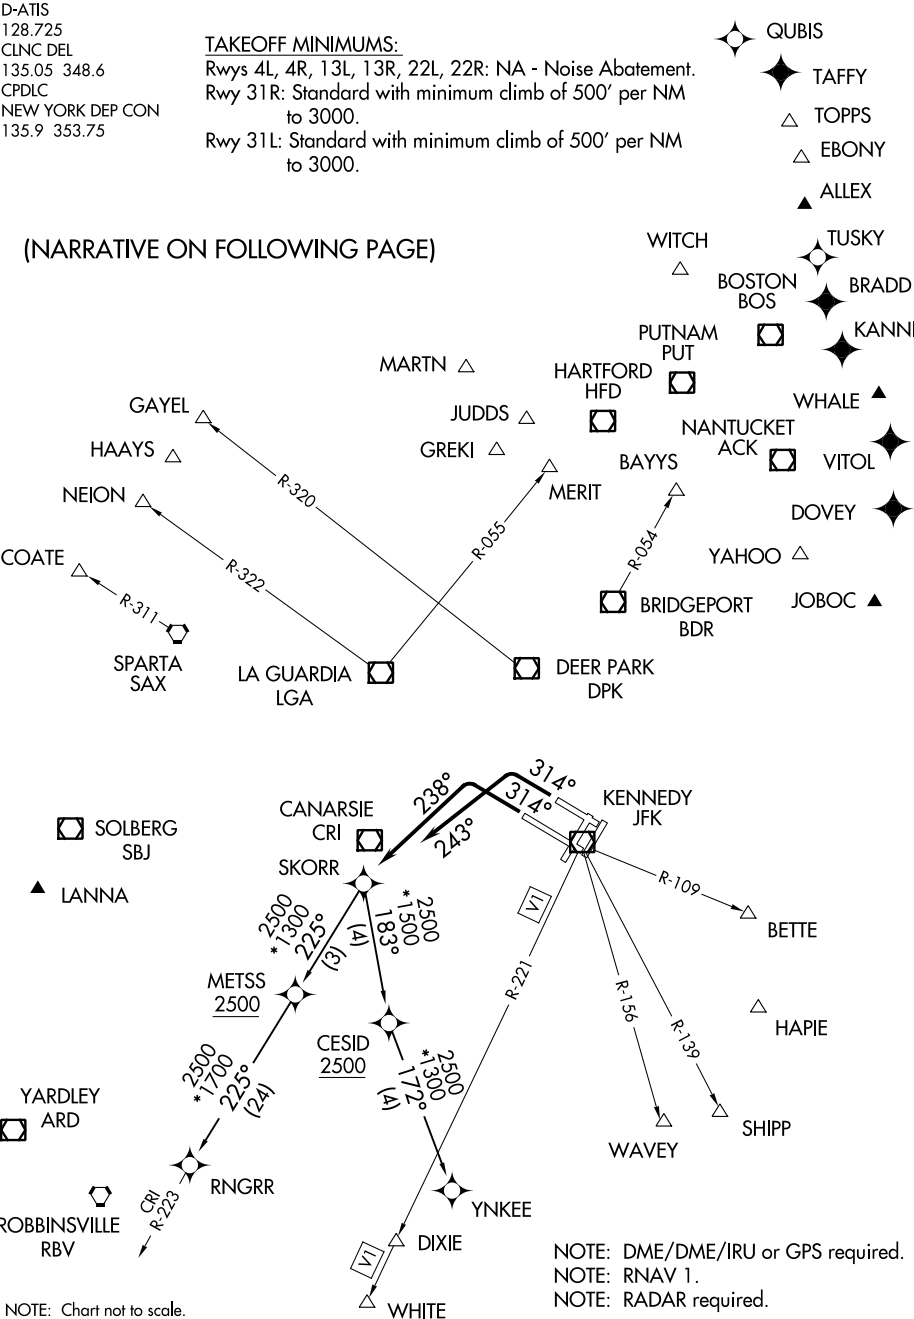

NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.