

LOC I-CDW	APP CRS	Rwy Idg	4418
109.35	223°	TDZE	172
		Apt Elev	172

LOC RWY 22

ESSEX COUNTY (CDW)


From ZEZE: RNAV 1-GPS required. RNAV 1-GPS or RADAR required for procedure entry.

NA

Circling to Rwy 4, 10, 28 NA at night. Rwy 22 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Newark altimeter setting and increase all MDA 60 feet and S-22 Cat A and Circling Cat C visibility ¼ SM. KOLLI INT minimums: increase all MDA 60 feet and increase S-22 Cats C/D and Circling Cats A and C visibility ¼ SM.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct CAT NDB and hold (ADF required).

ATIS	NEW YORK APP CON	CALDWELL TOWER ★	GND CON	CLNC DEL	UNICOM
135.5	127.6 379.9	119.8 (CTAF) 0	121.9	121.1	122.95

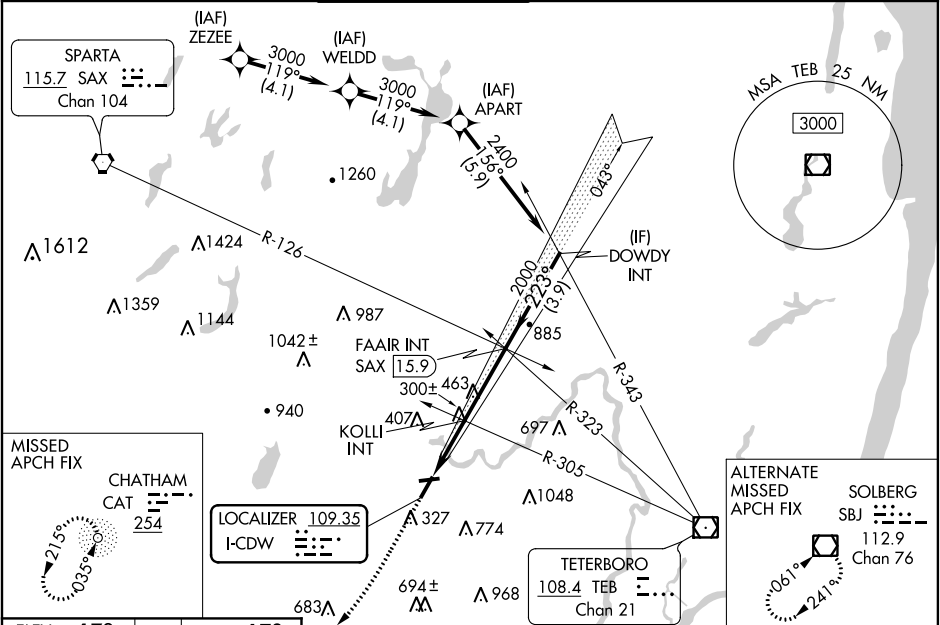

ELEV 172	TDZE 172
223° 5.4 NM from FAF	
3719 X 75	28
4592 X 80	TWR 261
REIL Rwy 22	MIRL Rwy 10-28
	HIRL Rwy 4-22
FAF to MAP 5.4 NM	
Knots	60 90 120 150 180
Min:Sec	5:24 3:36 2:42 2:10 1:48

600	2000	CAT
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 42).		
DOWDY INT		
FAAIR INT		
KOLLI INT		
2.4 NM		
3 NM		
3.9 NM		
223°		
2400		
2000		
1000		
≤ 3.10° TCH 58		

CATEGORY	A	B	C	D
S-LOC 22	1000-1 828 (900-1)	1000-1¼ 828 (900-1¼)	1000-2½	828 (900-2½)
CIRCLING	1000-1¼ 828 (900-1¼)	1040-1¼ 868 (900-1¼)	1100-2¾ 928 (1000-2¾)	1400-3 1228 (1300-3)
KOLLI INT MINIMUMS				
S-LOC 22	560-1 388 (400-1)	560-1½ 388 (400-1½)		
CIRCLING	960-1 788 (800-1)	1040-1¼ 868 (900-1¼)	1100-2¾ 928 (1000-2¾)	1400-3 1228 (1300-3)