

WAAS CH 65622 W06A	APP CRS 060°	Rwy Idg TDZE Apt Elev	7000 116 120
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6

NORTHEAST PHILADELPHIA (PNE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting and increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats, LNAV/VNAV all Cats, and LNAV Cat C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Philadelphia Intl altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
FLITS and hold.

ATIS 121.15	PHILADELPHIA APP CON 123.8 291.7	NORTHEAST PHILADELPHIA TOWER ★ 126.9 (CTAF) 0 278.8	GND CON 121.7	CLNC DEL 127.25	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

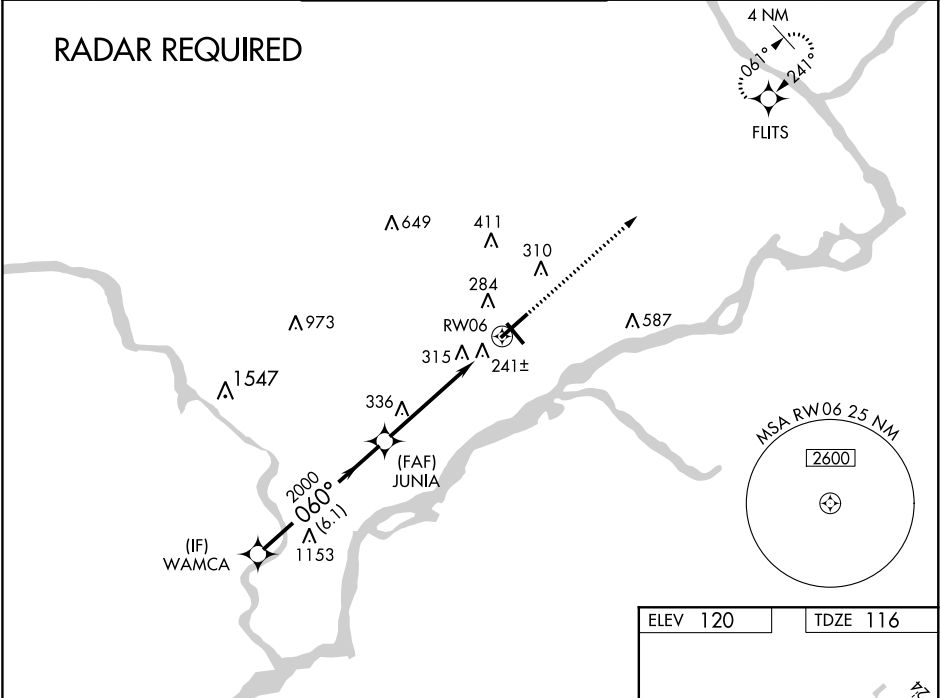

	WAMCA		JUNIA		3000	FLITS
	2000		2000		↑	✦
	GP 3.00°		060°		* 1.4 NM to RWY 06	
	TCH 57		060°		RWY 06	
	6.1 NM		4.3 NM		* LNAV only	
CATEGORY	A	B	C	D		
LPV DA	490-1¼		374 (400-1¼)			
LNAV/VNAV DA	540-1½		424 (500-1½)			
LNAV MDA	600-1	484 (500-1)	600-1¼	600-1½		
			484 (500-1¼)	484 (500-1½)		
CIRCLING	700-1	580 (600-1)	700-1½	700-2		
			580 (600-1½)	580 (600-2)		

HIRL Rwy 6-24
MIRL Rwy 15-33
REIL Rwy 6, 15 and 33