

VOR/DME EWC	APP CRS	Rwy Idg	4501
115.8	256°	TDZE	1253
Chan 105		Apt Elev	1253

VOR RWY 28


BEAVER COUNTY (BVI)

⚠

When local alimeter setting not received, use Pittsburgh Intl altimeter setting and increase MDAs 60 feet and visibility Circling Cats A and D ¼ SM and ZUDLO fix minimums S-28 Cats C/D ¼ SM and Circling Cat C ½ SM. Straight-in Rwy 28 NA at night, Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 then right turn direct EWC VOR/DME and hold.

ATIS	PITTSBURGH APP CON	BEAVER COUNTY TOWER ★	GND CON	CLNC DEL
118.35	124.75 338.2	120.3 (CTAF) 0	121.8	124.85 (when twr closed)

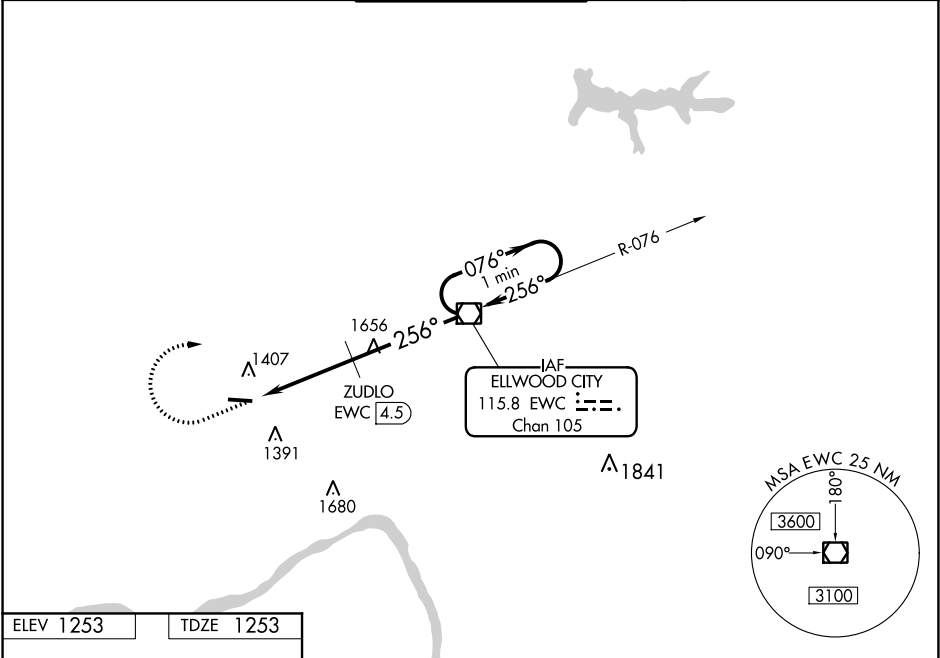


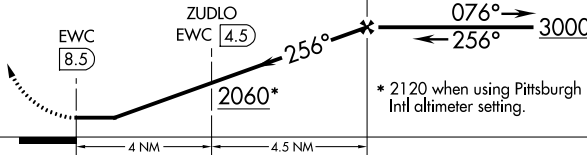


ELEV 1253 TDZE 1253

MIRL Rwy 10-28 0
REIL Rwys 10 and 28 0

FAF to MAP 8.5 NM

Knots	60	90	120	150	180
Min:Sec	8:30	5:40	4:15	3:24	2:50

3000				EWC	EWC VOR/DME	One Minute Holding Pattern
						
CATEGORY	A	B	C	D		
S-28	2060-1 807 (900-1)	2060-1 ¼ 807 (900-1 ¼)	2060-2 ½	807 (900-2 ½)		
CIRCLING	2060-2	807 (900-2)	2060-2 ½	807 (900-2 ½)		
ZUDLO FIX MINIMUMS (DME REQUIRED)						
S-28	1740-1	487 (500-1)	1740-1 ⅓	487 (500-1 ⅓)		
CIRCLING	1740-1	487 (500-1)	1740-1 ½ 487 (500-1 ½)	1820-2 567 (600-2)		