

WAAS CH <b>82308</b> <b>W21A</b>	APP CRS <b>207°</b>	Rwy Idg <b>5500</b> TDZE <b>1276</b> Apt Elev <b>1276</b>
--	------------------------	---

RNAV (GPS) RWY 21

EPHRATA MUNI (EPH)

RNP APCH.


▼









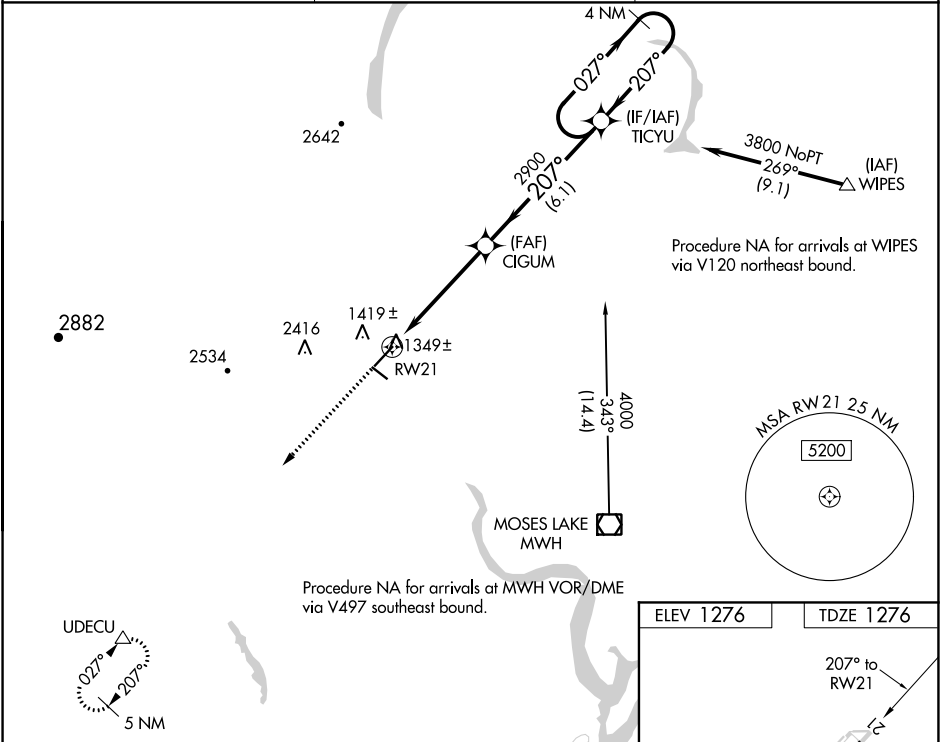




▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. VDP and Baro-VNAV NA when using Moses Lake/Grant County Intl altimeter setting. When local altimeter setting not received, use Moses Lake/Grant County Intl altimeter setting and increase all DA/MDA 40 feet; increase visibility LPV all Cats, and LNAV Cats C and D ¼ SM.

MISSED APPROACH: Climb to 4500 direct UDECU and hold.

ASOS <b>135.775</b>	GRANT COUNTY APP CON * <b>126.4 379.95</b>	UNICOM <b>122.8 (CTAF) 0</b>
------------------------	---	---------------------------------



4500	UDECU	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).		4 NM Holding Pattern
				
*LNAV only	*2.2 NM to RW21	CIGUM	TICYU	
				
	2.2 NM	2.7 NM	6.1 NM	
				
				
				
				GP 3.00° TCH 51
CATEGORY	A	B	C	D
LPV DA	1526-¾ 250 (300-¾)			
LNAV/ VNAV DA	2171-4 895 (900-4)			
LNAV MDA	2020-1 744 (800-1)	2020-1¼ 744 (800-1¼)	2020-2¼ 744 (800-2¼)	2020-2½ 744 (800-2½)

