RNAV (GPS) RWY 22

FRANK WILEY FIELD (MLS)

WAAS	APP CRS	Rwy Idg	5680
CH 77924	223°	TDZE	2628
W22A		Apt Elev	2630

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C (-11°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Forsyth altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Forsyth altimeter setting: increase LPV DA to 2966 and LNAV/VNAV DA to 2980 and all visibilities ⅛ mile. Increase all MDA 100 feet and LNAV Cat C and D visibility ⅜ mile and Circling Cat D ¼ mile.

MISSED APPROACH: Climb to 6000 direct OPEJY and hold, continue climb-in-hold to 6000.

ASOS	SALT LAKE CENTER	UNICOM
135.575	126.85 305.2	123.0 (CTAF) L

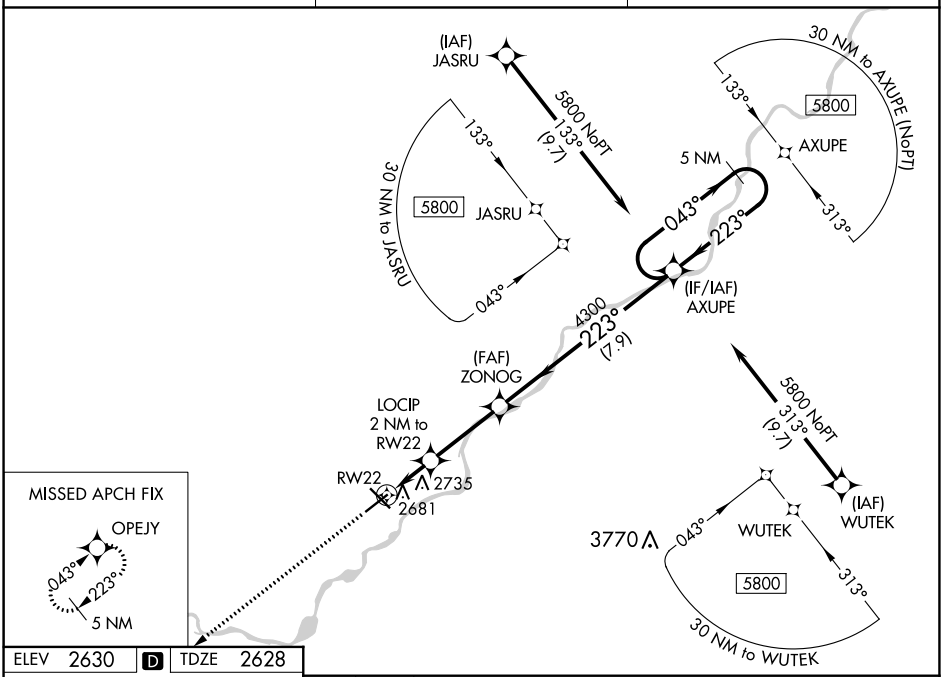

ELEV 2630 D TDZE 2628



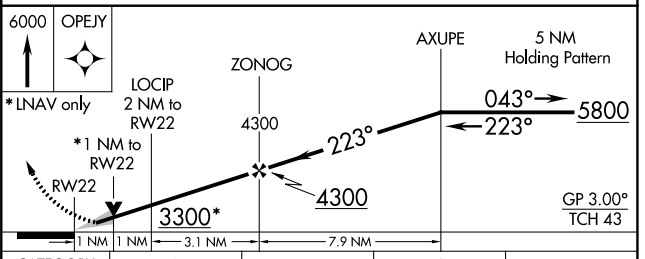

CATEGORY	A	B	C	D
LPV DA	2878-1 250 (300-1)			
LNAV/VNAV DA	2892-1 264 (300-1)			
LNAV MDA	3000-1 372 (400-1)			
C CIRCLING	3060-1 430 (500-1)	3100-1 470 (500-1)	3120-1½ 490 (500-1½)	3320-2¼ 690 (700-2¼)

MIRL Rwy 4-22 L
MIRL Rwy 13-31
REIL Rwys 4, 13, 22 and 31 L

NW-1, 31 DEC 2020 to 28 JAN 2021
NW-1, 31 DEC 2020 to 28 JAN 2021