WAAS	APP CRS	Rwy Idg 5680
CH 42600	043°	TDZE 2629
W04A		Apt Elev 2630

RNAV (GPS) RWY 4

FRANK WILEY FIELD (MLS)

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Forsyth altimeter setting. DME/DME RNP -0.3 NA. When local altimeter setting not received, use Forsyth altimeter setting: increase LPV and LNAV/VNAV DA to 2967 and all visibility ⅛ mile. Increase all MDA 100 feet and all Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 6000 direct AXUPE and hold, continue climb-in-hold to 6000.

ASOS	SALT LAKE CENTER	UNICOM
135.575	126.85 305.2	123.0 (CTAF) L

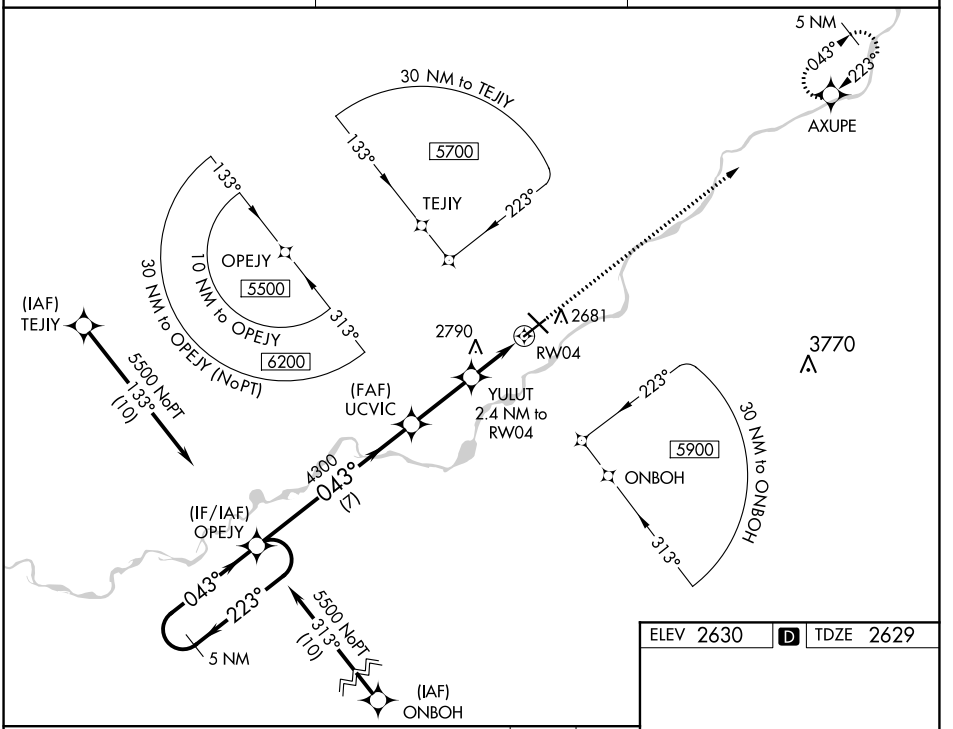

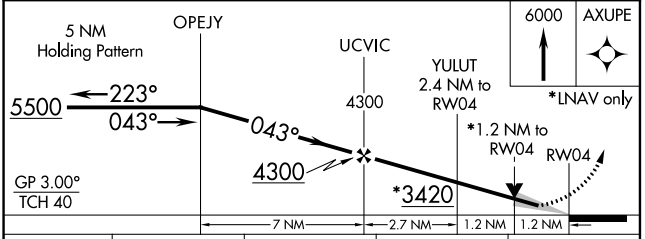

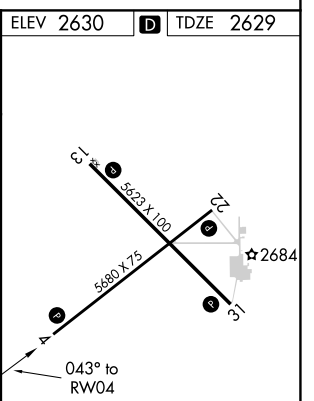

CATEGORY	A	B	C	D
LPV DA	2879-1 250 (300-1)			
LNAV/VNAV DA	2879-1 250 (300-1)			
LNAV MDA	3040-1 411 (500-1)		3040-1⅛ 411 (500-1⅛)	
C CIRCLING	3060-1 430 (500-1)	3100-1 470 (500-1)	3120-1½ 490 (500-1½)	3320-2¼ 690 (700-2¼)

MIRL Rwy 4-22 L
MIRL Rwy 13-31
REIL Rwys 4, 13, 22 and 31 L

NW-1, 31 DEC 2020 to 28 JAN 2021
NW-1, 31 DEC 2020 to 28 JAN 2021