


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 86605 W30A | APP CRS 301° | Rwy Idg TDZE Apt Elev | 7504 405 410 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) Y RWY 30
TRI-CITIES (PSC)

| | | |
|--|-----------|---|
| RNP APCH. Baro-VNAV and VDP NA when using Hermiston altimeter setting. Rwy 30 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. When local altimeter setting not received, use Hermiston altimeter setting; increase all DA 95 feet and all MDA 100 feet. Increase LPV and LNAV/VNAV all Cats visibilities 1/4 mile; increase LNAV and Circling Cats C and D visibility 1/4 mile. | ODALS | MISSED APPROACH: Climb to 900 then climbing left turn to 5200 direct PAIDS and hold, continue climb-in-hold to 5200. |
|--|-----------|---|

| | | | | | |
|-----------------------|---|--|-------------------------|--------------------------|-------------------------|
| ATIS 125.65 | CHINOOK APP CON* 128.75 377.2 | TRI-CITIES TOWER* 135.3 (CTAF) 0 323.3 | GND CON 121.8 | CLNC DEL 120.0 | UNICOM 122.95 |
|-----------------------|---|--|-------------------------|--------------------------|-------------------------|

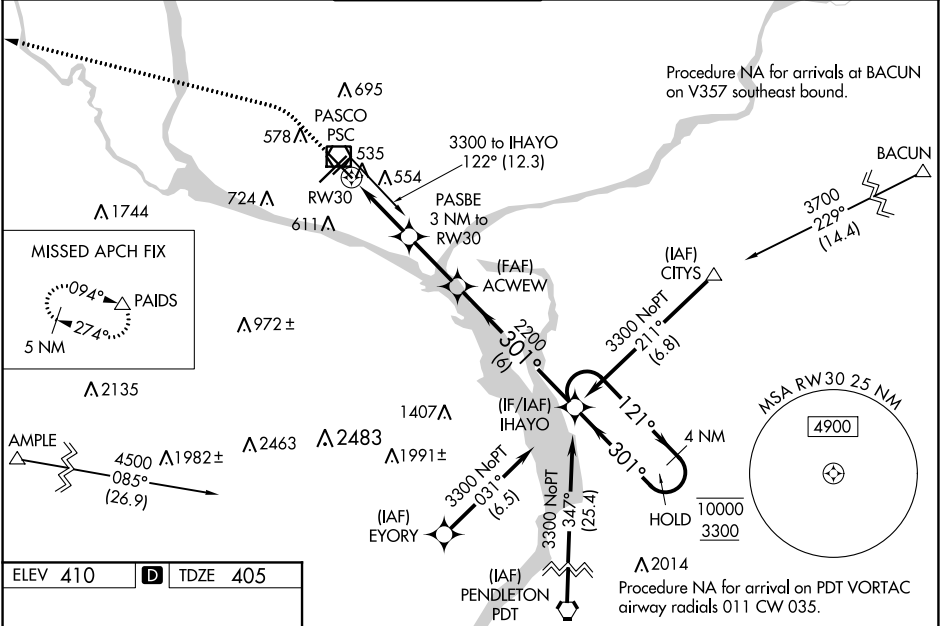

| | | |
|----------|---|----------|
| ELEV 410 | D | TDZE 405 |
|----------|---|----------|

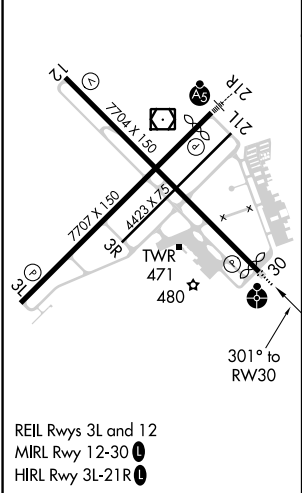

| | | | | | | |
|-----------------|----------------------|----------------------|-------------------------------|-------------------------------|-------|-----------------|
| 900 | 5200 | PAIDS | ACWEW | IHAYO | 4 NM | Holding Pattern |
| *LNAV only | PASBE 3 NM to RW30 | 2200 | 301° | 121° | 10000 | 3300 |
| *1.2 NM to RW30 | 1400* | 2200 | 301° | 121° | 10000 | 3300 |
| 1.2 NM | 1.8 NM | 2.5 NM | 6 NM | | | |
| GP 3.00° TCH 54 | | | | | | |
| CATEGORY | A | B | C | D | | |
| LPV DA | 655-3/4 | 250 (300-3/4) | | | | |
| LNAV/VNAV DA | 749-1 | 344 (400-1) | | | | |
| LNAV MDA | 840-3/4 | 435 (500-3/4) | 840-1 1/8 | 435 (500-1 1/8) | | |
| CIRCLING | 880-1 470 (500-1) | 940-1 530 (600-1) | 1040-1 3/4 630 (700-1 3/4) | 1100-2 1/4 690 (700-2 1/4) | | |