RNAV (GPS) RWY 29

L M CLAYTON (OLF)

WAAS	APP CRS	Rwy Idg	5091
CH 49229	291°	TDZE	1989
W29A		Apt Elev	1989

-38°C

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Glasgow altimeter setting and increase all DA 141 feet and all MDA 160 feet and increase LPV all Cats visibility ⅜ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C/D visibility ½ mile, and Circling Cats C/D visibility ¼ mile. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH: Climb to 4500 direct RULIE and hold.

ASOS	SALT LAKE CENTER	UNICOM
118.325	126.85 305.2	122.8 (CTAF) L

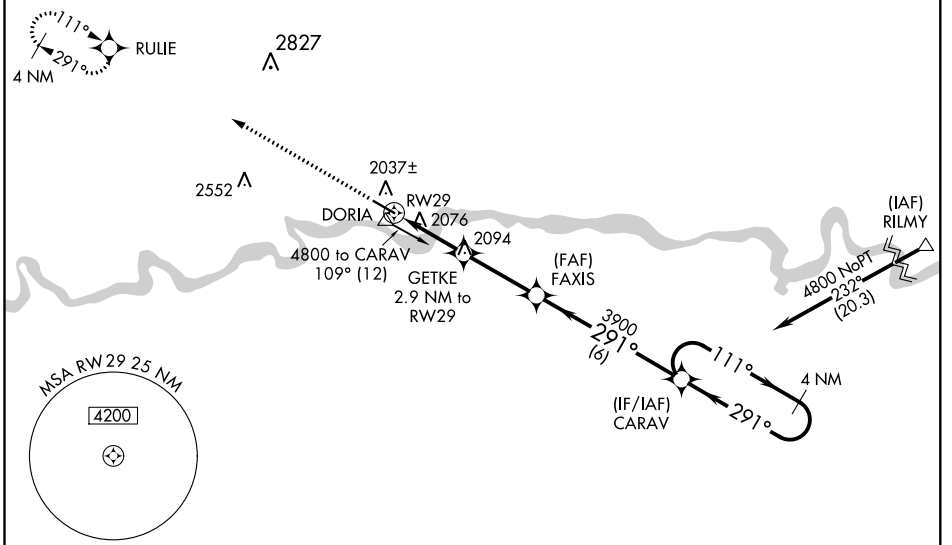

ELEV 1989	TDZE 1989



MIRL Rwy 11-29 L
REIL Rwy 11-29 L

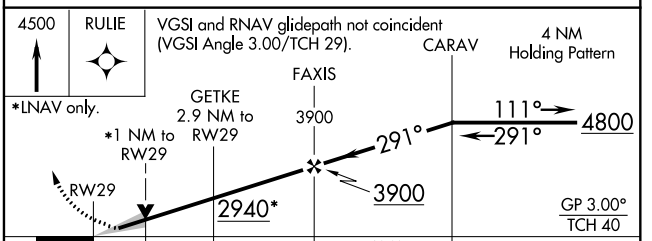

CATEGORY	A	B	C	D
LPV DA	2189- ¾ 200 (200- ¾)			
LNAV/VNAV DA	2239- ⅞ 250 (300- ⅞)			
LNAV MDA	2340-1 351 (400-1)			
CIRCLING	2480-1 491 (500-1)		2480-1½ 491 (500-1½)	2540-2 551 (600-2)

NW-1, 31 DEC 2020 to 28 JAN 2021
NW-1, 31 DEC 2020 to 28 JAN 2021