


APP CRS	Rwy Idg	9800
176°	TDZE	1282
	Apt Elev	1296

RNAV (RNP) Z RWY 17R

WILL ROGERS WORLD (OKC)

RNP AR APCH.		MALSR	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct JESKE and hold.
ASR	For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.		

D-ATIS	OKE CITY APP CON	ROGERS TOWER	GND CON	CLNC DEL
125.85	124.6 266.8	119.35 269.45	121.9 348.6	124.35

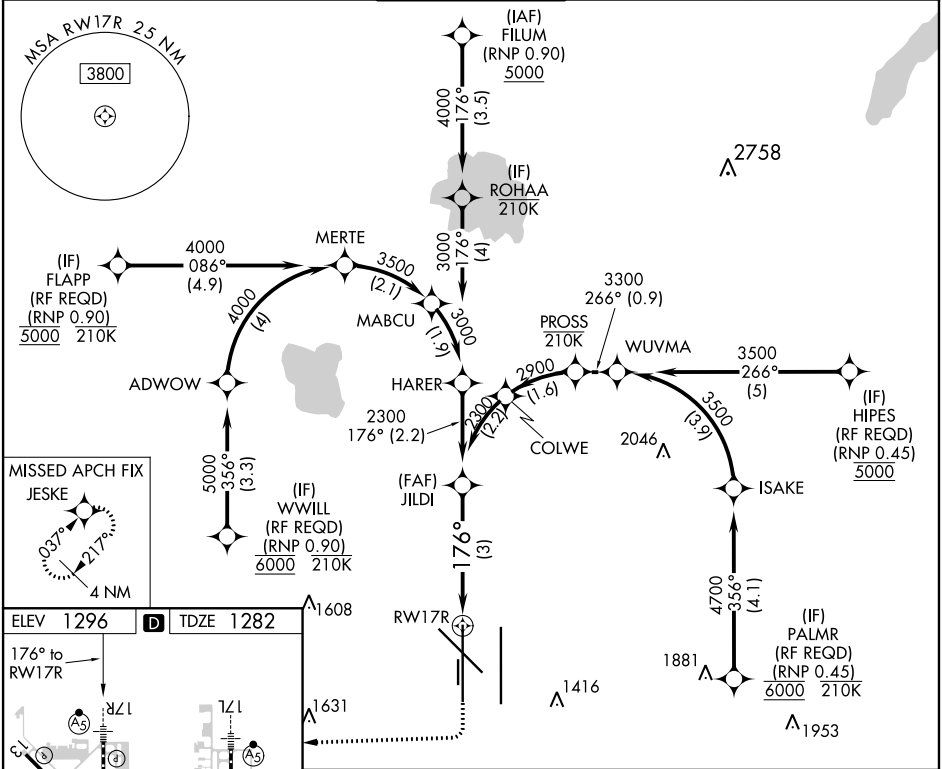

GP 3.00° TCH 55

2300

3 NM

See planview for multiple IF locations.

176°

RW17R

2000 3000 JESKE

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 60).

CATEGORY	A	B	C	D
RNP 0.20 DA	1559/24		277 (300-½)	
RNP 0.30 DA	1677/35		395 (400-¾)	

AUTHORIZATION REQUIRED