

| | | |
|------------------------|-----------------------------|---|
| APP CRS 265° | Rwy Idg TDZE Apt Elev | 9025 3962 3962 |
|------------------------|-----------------------------|---|

RNAV (RNP) Z RWY 26L

EL PASO INTL (ELP)

ASR


For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALS, increase RNP 0.30 visibility all Cats to 1 mile. GPS Required.

MALS

MISSED APPROACH:

Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.

| | | | | |
|------------------------------|---|---------------------------------------|-------------------------------|--------------------------------|
| D-ATIS 120.0 254.3 | EL PASO APP CON 124.25 298.85 | EL PASO TOWER 118.3 239.275 | GND CON 121.9 348.6 | CLNC DEL 125.0 379.1 |
|------------------------------|---|---------------------------------------|-------------------------------|--------------------------------|

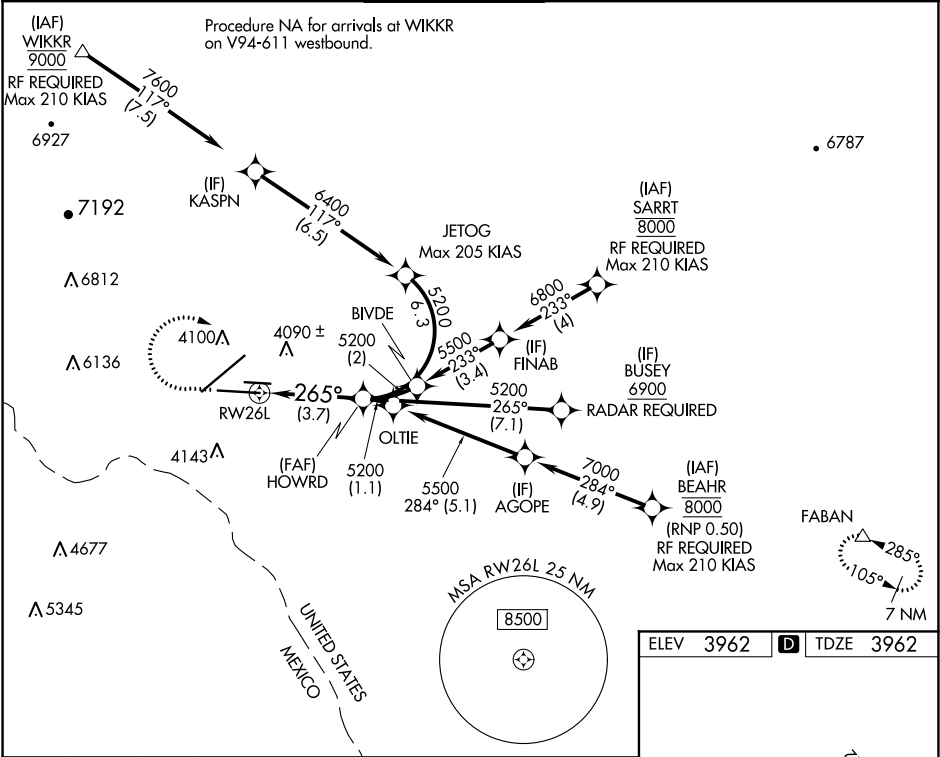

4400

7500

FABAN

VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).

HOWRD

See planview for multiple IF locations.

| | | | | |
|-------------|--------------------|---|---|---|
| CATEGORY | A | B | C | D |
| RNP 0.30 DA | 4275-½ 313 (400-½) | | | |

AUTHORIZATION REQUIRED

ELEV 3962

TDZE 3962

MIRL Rwy 8L-26R

REIL Rwys 4 and 8R

HIRL Rwys 4-22 and 8R-26L

SC-3, 31 DEC 2020 to 28 JAN 2021

SC-3, 31 DEC 2020 to 28 JAN 2021