

SC-3, 31 DEC 2020 to 28 JAN 2021

TOP ALTITUDE:
ASSIGNED BY ATC

SAN ANGELO
SJT

ATIS ★
120.825
CLNC DEL (When twr closed)
121.35
GND CON
120.125
SAN MARCOS TOWER ★
126.825
AUSTIN DEP CON
119.0 370.85

TAKEOFF MINIMUMS

Rwys 8, 13, 17, 26: Standard.
Rwy 31: Standard with minimum climb of 210' per NM to 2600.
Rwy 35: Standard with minimum climb of 230' per NM to 2600.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF Rwy 8: Climb heading 081° or as assigned by ATC for RADAR vectors to cross AMUSE at or above 5000. Thence....
TAKEOFF Rwy 13: Climb heading 126° or as assigned by ATC for RADAR vectors to cross AMUSE at or above 5000. Thence....
TAKEOFF Rwy 17: Climb heading 171° or as assigned by ATC for RADAR vectors to cross AMUSE at or above 5000. Thence....
TAKEOFF Rwy 26: Climb heading 261° or as assigned by ATC for RADAR vectors to cross AMUSE at or above 5000. Thence....
TAKEOFF Rwy 31: Climb heading 306° or as assigned by ATC for RADAR vectors to cross AMUSE at or above 5000. Thence....
TAKEOFF Rwy 35: Climb heading 351° or as assigned by ATC for RADAR vectors to cross AMUSE at or above 5000. Thence....

.... on track 293° to AEROZ, then on SAN ANGELO TRANSITION. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.

SAN ANGELO TRANSITION (AEROZ1.SJT):

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV-1.

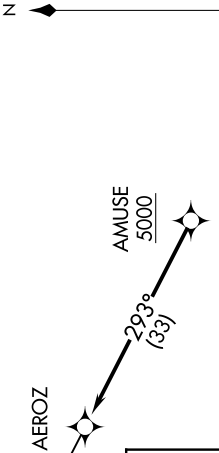

SC-3, 31 DEC 2020 to 28 JAN 2021