

RNAV (GPS) RWY 11

APCH CRS	Rwy Idg	8000
105°	TDZE	318
	Arpt Elev	322

AL-2440 [USN]

GOLIAD NOLF (KNGT)


RNP APCH - DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

When local altimeter setting not received, use Beeville Muni altimeter setting.


ASOS
353.675

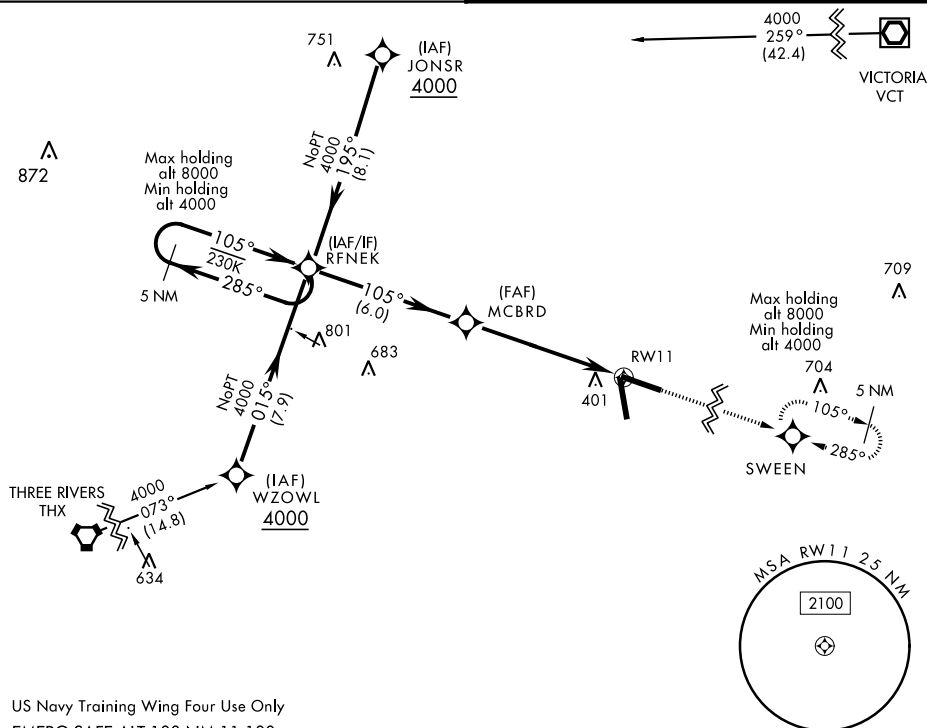

CTAF
132.875 307.075



US Navy Training Wing Four Use Only
EMERG SAFE ALT 100 NM 11.100

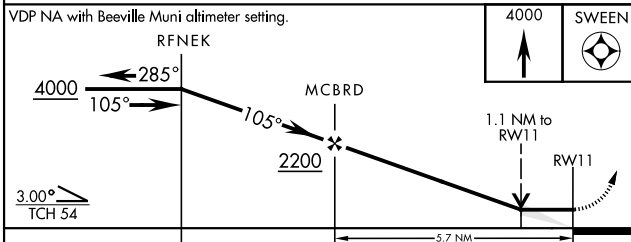VDP NA with Beeville Muni altimeter setting.



CATEGORY	A		B		C		D	
LNNAV MDA	720-1	402	(400-1)		720-1½	402	(400-1½)	
 CIRCLING	760-1		780-1		780-1½		880-2	
	438 (500-1)		458 (500-1)		458 (500-1½)		558 (600-2)	
BEEVILLE MUNI ALTIMETER SETTING MINIMA								
LNNAV MDA	760-1	442	(500-1)		760-1¾	442	(500-1¾)	
 CIRCLING	800-1	478	(500-1)		800-1½		880-2	
					478 (500-1½)		558 (600-2)	

