APP CRS	Rwy Idg	7510
312°	TDZE	43
	Apt Elev	46

RNAV (RNP) Z RWY 31

CORPUS CHRISTI INTL (CRP)

For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS and RF required. For inop MALSR, increase RNP 0.14 all Cats visibility to ⅞ mile.
*Missed approach requires minimum climb of 335 feet per NM to 500.

MALSR

MISSED APPROACH: Climb to 2000 on track 312° to ATHIS and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

SKIDS
4000
164° (10.3)
110°
ATHIS
290°
4 NM
(IAF)
EJUXO
(RNP 0.50)
4000
164° (10.7)
Procedure NA for arrivals on CRP VORTAC airway radials 169 CW 184.
(IAF)
COPAN
(RNP 0.50)
4000
219° (20.5)
(IAF)
CORPUS CHRISTI
CRP
(RNP 0.50)
4000
186° (5.7)
MSA RW31 25 NM
2200
FEDEB
4000
135° (5.9)
312° (25.9)
470
(IF)
RIXMU
423
CUNRO
562±
358
3200
222° (2.7)
PIVGY
Max 180 KIAS
508
4000
218° (2.9)
(IF)
ZUNER
1050
RW31
250
QODLU
312° (1.7)
Cuddihy (Pvt)
Cabaniss Field NOLF
1048
2400
133° (8)
2400 (3.5)
SIWOC
Max 180 KIAS
1200 (5.3)
(FAF)
NIGBE
1051

ELEV 46 D TDZE 43

18
13
7510 X 150
6080 X 150
TWR
184
36
31
312° to RW31

HIRL Rwys 13-31 and 18-36

2000	ATHIS	See planview for multiple IF locations.
tr 312°		

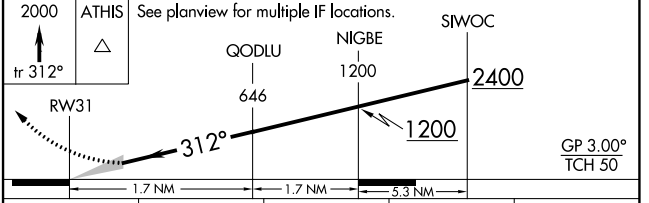

CATEGORY	A	B	C	D
RNP 0.14 DA*		303-½	260 (300-½)	
RNP 0.30 DA		384-⅝	341 (400-⅝)	

AUTHORIZATION REQUIRED

SC-3, 31 DEC 2020 to 28 JAN 2021
SC-3, 31 DEC 2020 to 28 JAN 2021