# RNAV (GPS) RWY 36

## VICKSBURG TALLULAH RGNL (TVR)

| WAAS | APP CRS | Rwy Idg | 5002 |
|---|---|---|---|
| Chan 99700 | 357° | TDZE | 86 |
| W36A | | Apt Elev | 86 |

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting and increase LPV DA to 309 feet, LNAV/VNAV DA to 516 feet all visibilities ⅛ mile; increase all MDA 40 feet and visibility Cats C/D¼ mile. Baro-VNAV and VDP NA with Vicksburg Muni, MS altimeter setting.

SSALR (A3)

MISSED APPROACH: Climb to 2000 direct DEXIW and hold.

| ASOS | MEMPHIS CENTER | UNICOM |
|---|---|---|
| 118.525 | 132.5 259.1 | 123.0 (CTAF) L |

MISSED APCH FIX




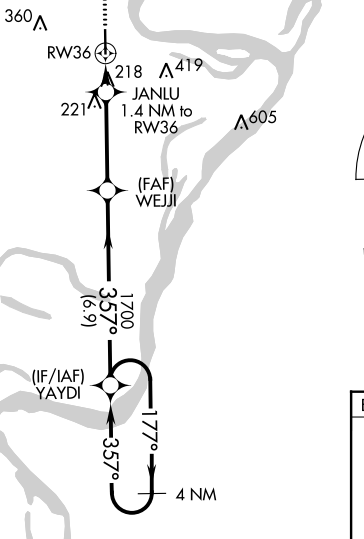


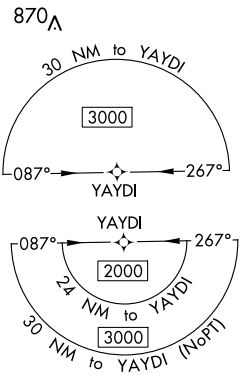


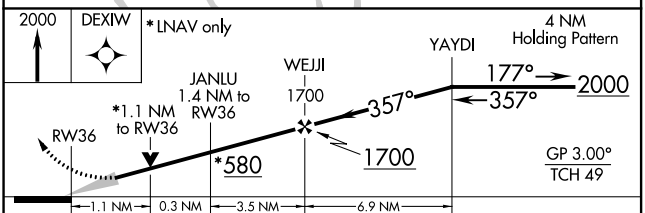


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | | 286-½ | 200 (200-½) | |
| LNAV/VNAV DA | | 493-⅞ | 407 (500-⅞) | |
| LNAV MDA | 480-½ | 394 (400-½) | 480-⅝ | 394 (400-⅝) |
| C CIRCLING | 540-1 | 454 (500-1) | 720-1¾ 634 (700-1¾) | 720-2 634 (700-2) |

ELEV 86 D TDZE 86

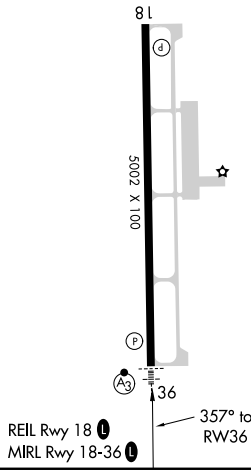




SC-4, 31 DEC 2020 to 28 JAN 2021
SC-4, 31 DEC 2020 to 28 JAN 2021