RNAV (GPS) RWY 31R

VICTORIA RGNL (VCT)

WAAS CH 82726 W31A	APP CRS 308°	Rwy Idg 9111 TDZE 106 Apt Elev 115

Baro-VNAV NA when using Port Lavaca altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When local altimeter setting not received, use Port Lavaca altimeter setting and increase all DA 52 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D/E visibility to 1⅛ mile. DME/DME RNP-0.3 NA. VDP NA with Port Lavaca altimeter setting.

MISSED APPROACH: Climb to 2200 direct CUDKO and hold.

ATIS	HOUSTON CENTER	VICTORIA TOWER *	GND CON	UNICOM
119.025	135.05 353.6	126.075 (CTAF) L 257.95	120.525 239.25	122.7

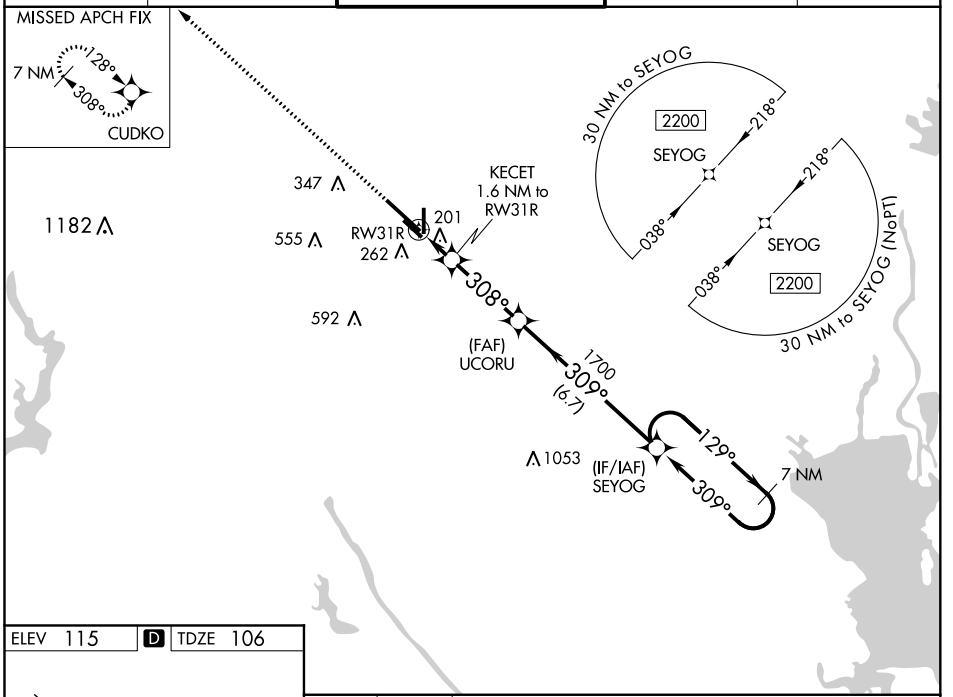

ELEV 115 D TDZE 106



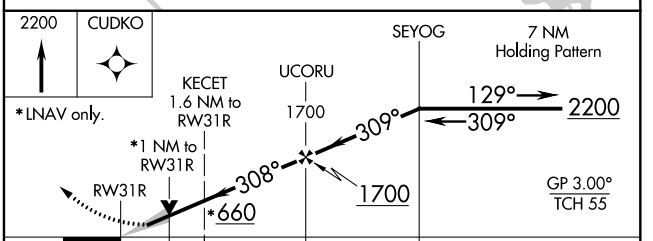

CATEGORY	A	B	C	D	E
LPV DA	306-¾ 200 (200-¾)				
LNAV/VNAV DA	374-⅞ 268 (300-⅞)				
LNAV MDA	460-1 354 (400-1)				
CIRCLING	580-1 465 (500-1)		580-1½ 465 (500-1½)	680-2 565 (600-2)	NA

MIRL Rwy 18-36
REIL Rwy 18 and 36
HIRL Rwy 13L-31R L

SC-5, 31 DEC 2020 to 28 JAN 2021
SC-5, 31 DEC 2020 to 28 JAN 2021