BLTWY SIX DEPARTURE (RNAV)

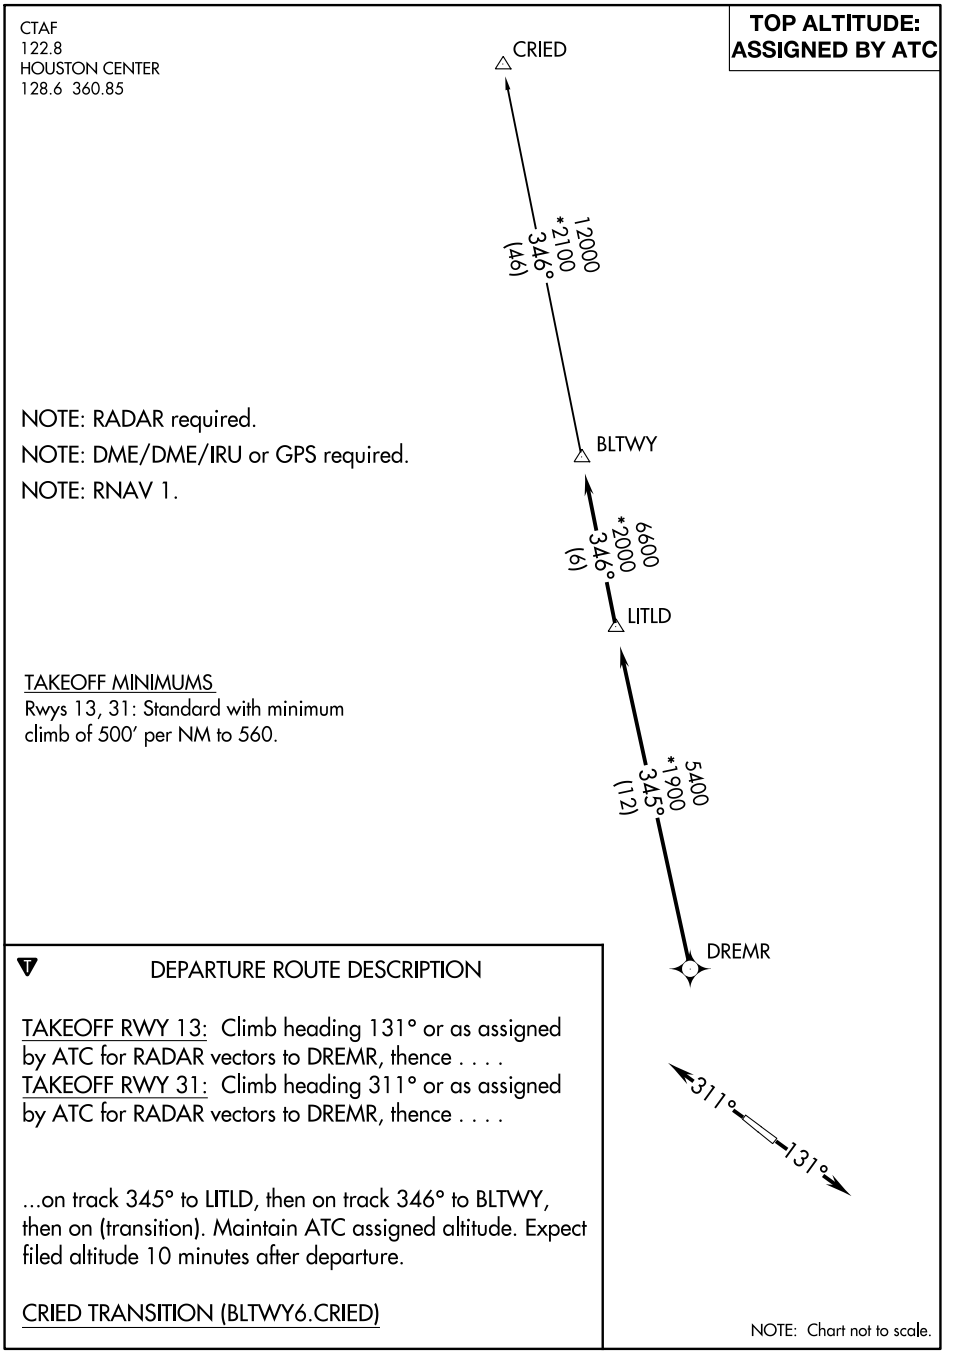

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwys 13, 31: Standard with minimum climb of 500′ per NM to 560.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° or as assigned by ATC for RADAR vectors to DREMR, thence . . . .

TAKEOFF RWY 31: Climb heading 311° or as assigned by ATC for RADAR vectors to DREMR, thence . . . .

...on track 345° to LITLD, then on track 346° to BLTWY, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

CRIED TRANSITION (BLTWY6.CRIED)

NOTE: Chart not to scale.

SC-5, 31 DEC 2020 to 28 JAN 2021
SC-5, 31 DEC 2020 to 28 JAN 2021