



ILS or LOC RWY 36L
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

D-ATIS		CINCINNATI APP CON		CINCINNATI TOWER		GND CON	CLNC DEL
ARR	DEP	119.7	363.15 (090°-269°)	118.975	360.85 (RWY 18L/36R)	121.7	127.175
134.375	135.3	123.875	363.15 (270°-089°)	118.3	(RWY5 18C/36C 09/27)		

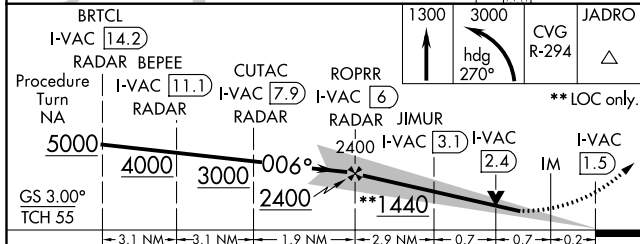

CATEGORY	A	B	C	D
S-ILS 36L	1073/18 200 (200-½)			
S-LOC 36L	1440/24 567 (600-½)		1440/60 567 (600-1¼)	
CIRCLING	1460-1 564 (600-1)		1460-1½ 564 (600-1½)	1560-2 664 (700-2)
JIMUR FIX MINIMUMS				
S-LOC 36L	1220/24 347 (400-½)		1220/30 347 (400-⅝)	
CIRCLING	1460-1 564 (600-1)		1460-1½ 564 (600-1½)	1560-2 664 (700-2)

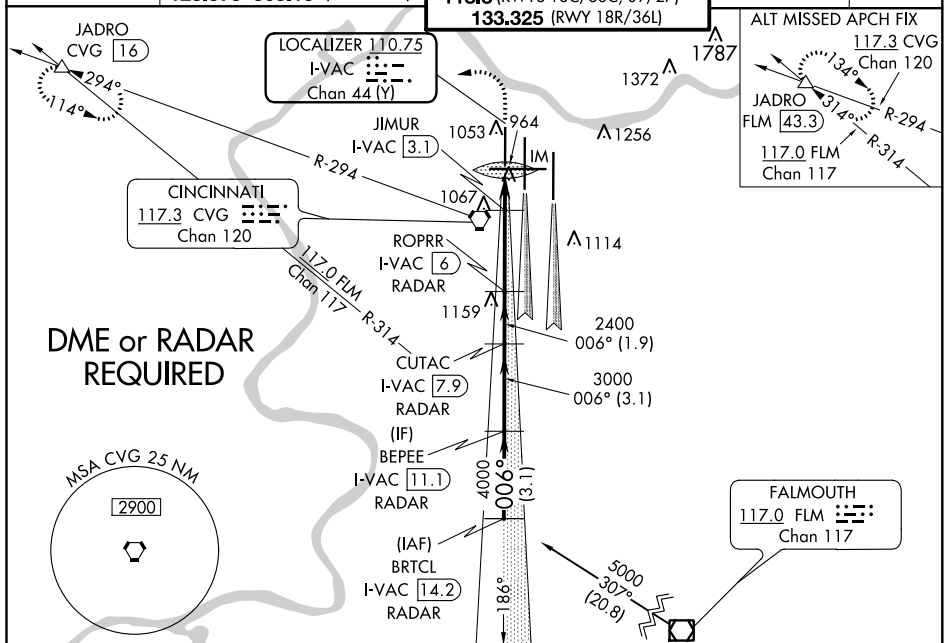