RNAV (GPS) Y RWY 36L

CHARLOTTE/DOUGLAS INTL (CLT)

WAAS	APP CRS	Rwy Idg	9000
CH 56515	003°	TDZE	744
W36A		Apt Elev	748

RADAR required for procedure entry. RNP APCH.

Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and increase LNAV Cats C/D visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct BUDKE and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER			GND CON		CLNC DEL
ARR 121.15	(001°-119°)	128.32	(Rwys 18L-36R, 5-23)	118.1	257.8	121.8	348.6 (WEST)	127.15
DEP 132.1	(120°-295°)	120.05	(Rwy 18C-36C)	126.4	257.8	121.9	348.6 (EAST)	348.6
	(296°-360°)	134.75	(Rwy 18R-36L)	133.35	257.8			CPDLC
	(180°-359°)	257.2						
	(360°-179°)	307.8						

MISSED APCH FIX

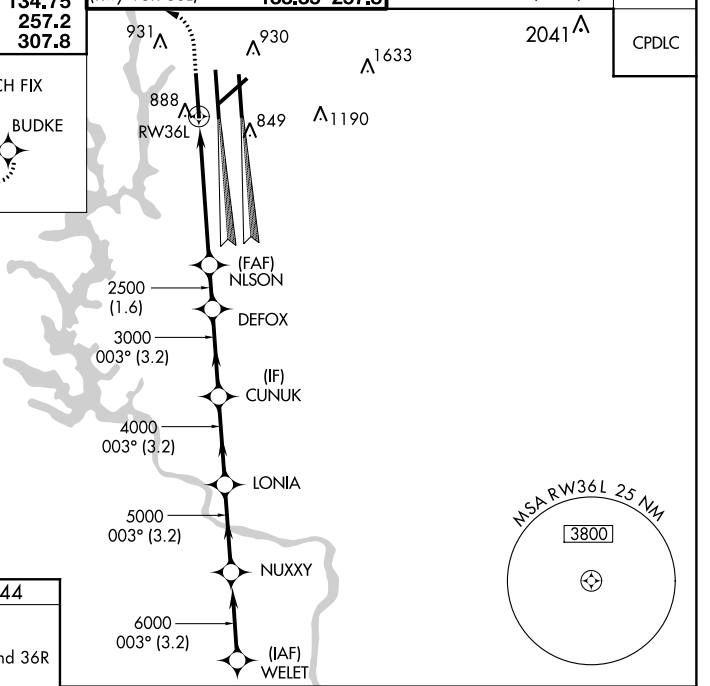

ELEV 748 | D | TDZE 744

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

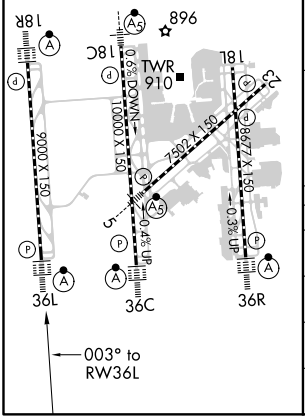

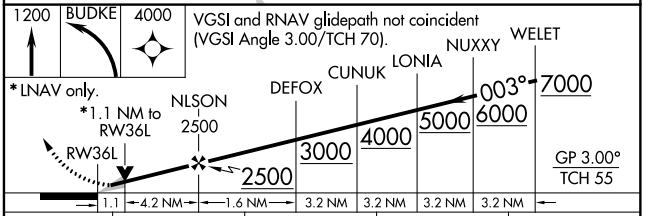

CATEGORY	A	B	C	D
LPV DA	944/18 200 (200-½)			
LNAV/VNAV DA	1049/24 305 (400-½)			
LNAV MDA	1140/24 396 (400-½)		1140/35 396 (400-⅝)	
C CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

SE-2, 31 DEC 2020 to 28 JAN 2021
SE-2, 31 DEC 2020 to 28 JAN 2021