

WEAZL FOUR DEPARTURE (RNAV)

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)

CHARLOTTE, NORTH CAROLINA

TOP ALTITUDE:
8000

D-ATIS DEP 132.1

CLNC DEL

127.15 348.6

CPDLC

GND CON

121.8 348.6 (WEST)

121.9 348.6 (EAST)

CHARLOTTE TOWER


118.1 257.8 (Rwys 18L-36R, 5-23)

126.4 257.8 (Rwy 18C-36C)

133.35 257.8 (Rwy 18R-36L)

CHARLOTTE DEP CON

120.5 257.2

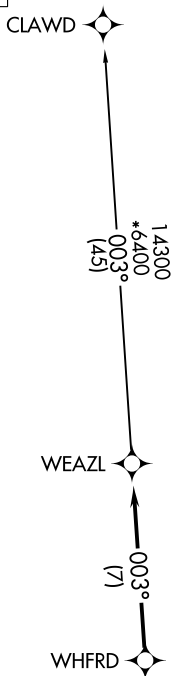

NOTE: For turbojets only.


NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: RADAR required.

NOTE: If unable to accept climb rates, advise ATC on initial contact.

NOTE: Accelerate to 250K, if unable advise ATC.
Upon reaching 10000 MSL, accelerate to
and maintain 280K, if unable advise ATC.

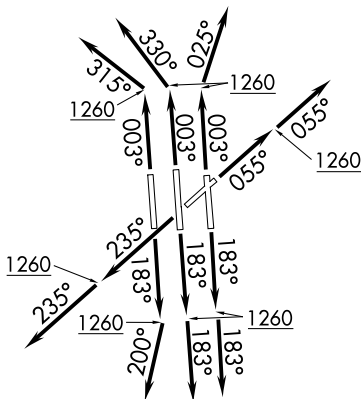

TAKEOFF MINIMUMS

Rwys 18C/L/R, 23, 36C/R: Standard with minimum climb of 500' per NM to 1260.

Rwy 5: Standard with minimum climb of 500' per NM to 1300.

Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

WEAZL FOUR DEPARTURE (RNAV)

(WEAZL4.WEAZL) 03JAN19

CHARLOTTE, NORTH CAROLINA

CHARLOTTE/DOUGLAS INTL (CLT)

SE-2, 31 DEC 2020 to 28 JAN 2021