

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>49008</b><br><b>W05A</b> | APP CRS<br><b>045°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>18</b><br><b>18</b> |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 5

CURRITUCK COUNTY RGNL (ONX)


▼

▲


Baro-VNAV NA when using Oceana NAS/Apollo Soucek altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Procedure NA when tethered balloon located approximately 11.4 NM southwest of airport is flying. When local altimeter setting not received, use Oceana NAS/Apollo Soucek altimeter setting and increase all DA 59 feet, and all MDA 60 feet; increase LNAV Cat. C and D visibility ¼ mile.

MISSED APPROACH:  
Climb to 2000 direct  
HABKI and hold.

|                          |                                      |                       |
|--------------------------|--------------------------------------|-----------------------|
| AWOS-3<br><b>119.775</b> | OCEANA APP CON<br><b>123.9 266.8</b> | CTAF<br><b>122.90</b> |
|--------------------------|--------------------------------------|-----------------------|

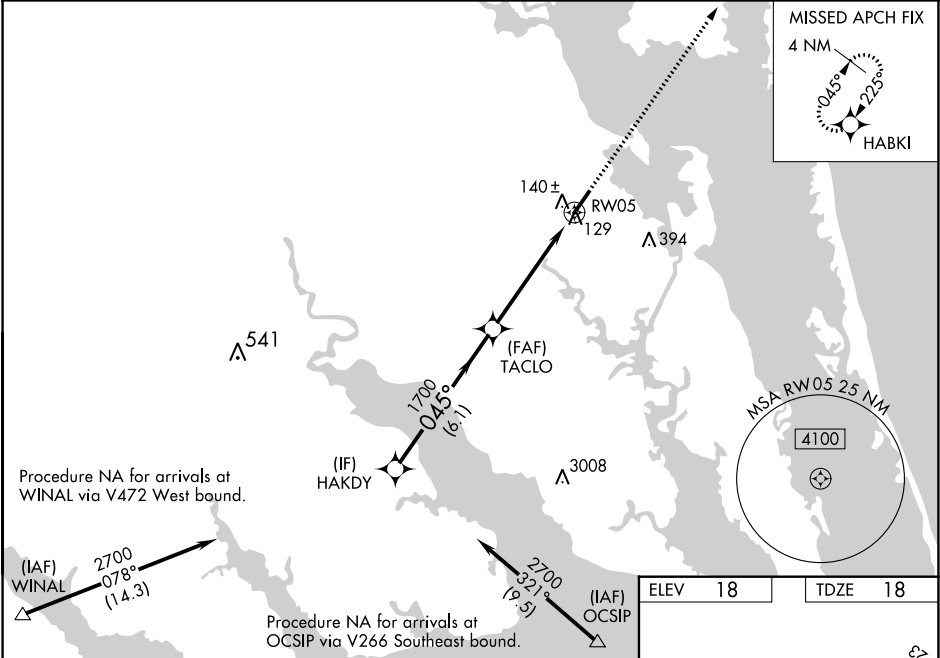

|                   |                     |                   |                     |                   |                     |       |
|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|-------|
|                   |                     |                   |                     |                   | 2000                | HABKI |
| Procedure Turn NA |                     |                   |                     |                   |                     |       |
| GP 3.00°          |                     |                   |                     |                   |                     |       |
| TCH 45            |                     |                   |                     |                   |                     |       |
| CATEGORY          | A                   | B                 | C                   | D                 |                     |       |
| LPV DA            | 343-1¼ 325 (400-1¼) |                   |                     |                   |                     |       |
| LNAV/VNAV DA      | 410-1½ 392 (400-1½) |                   |                     |                   |                     |       |
| LNAV MDA          | 400-1 382 (400-1)   |                   |                     |                   | 400-1¼ 382 (400-1¼) |       |
| CIRCLING          | 440-1 422 (500-1)   | 480-1 462 (500-1) | 480-1½ 462 (500-1½) | 580-2 562 (600-2) |                     |       |

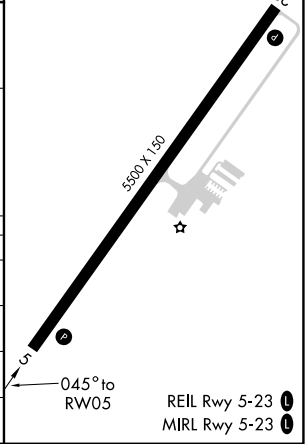

SE-2, 31 DEC 2020 to 28 JAN 2021

SE-2, 31 DEC 2020 to 28 JAN 2021