


WAAS CH 56201 W27B	APP CRS 274°	Rwy Idg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L
MELBOURNE INTL (MLB)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°F (130°F). ▲ MISSED APPROACH: Climb to 2000 direct SUROY and hold.		ATIS 132.55	ORLANDO APP CON 132.65 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 132.65 (When twr closed)	UNICOM 122.95
---	--	-----------------------	--	---	-------------------------	--------------------------	--	-------------------------

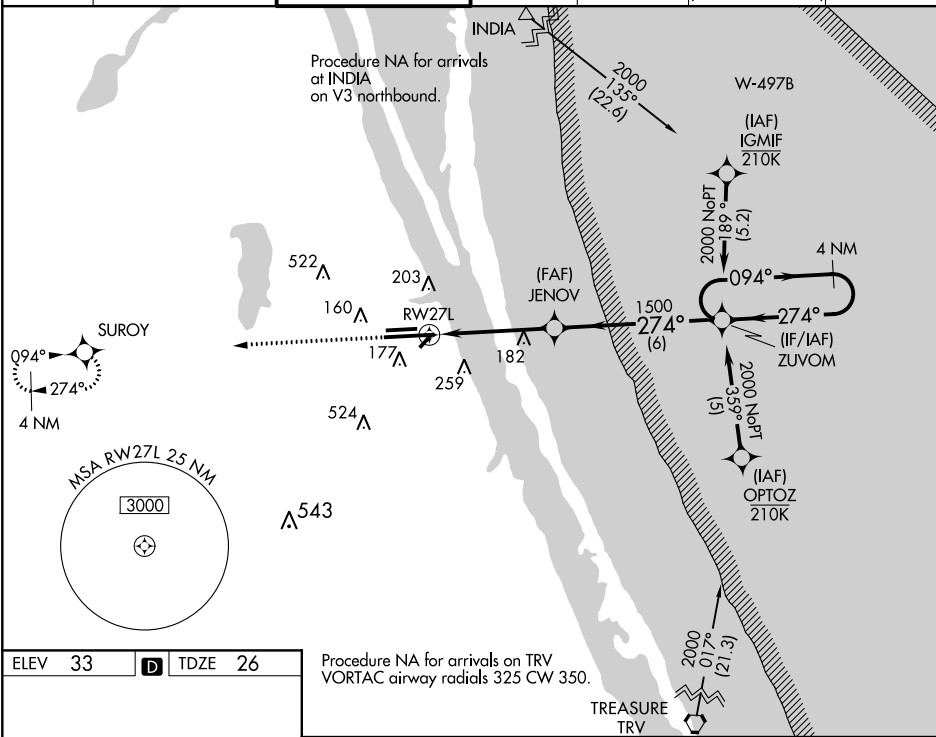

2000

↑

SUROY

✦

*LNAV only.

RWY27L

1.3

3.2 NM

6 NM

JENOV

1500

ZUVOM

4 NM Holding Pattern

094° →

← 274°

2000

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
LPV DA	226-3/4 200 (200-3/4)			
LNAV/VNAV DA	318-7/8 292 (300-7/8)			
LNAV MDA	500-1 474 (500-1)		500-1 3/8 474 (500-1 3/8)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1 3/4 647 (700-1 3/4)	880-2 3/4 847 (900-2 3/4)

REIL Rwy 27L

HIRL Rwy 9R-27L

MIRL Rwy 5-23 and 9L-27R

TDZ/CL Rwy 9R