

WAAS
CH 40405
W09A

APP CRS
093°

Rwy Idg 4801
TDZE 3
Apt Elev 3

RNAV (GPS) RWY 9
KEY WEST INTL (EYW)

T

A


W

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. If local altimeter setting not received, use Key West NAS/ Boca Chica Fld altimeter setting.

MISSED APPROACH: Climb to 3000 direct GUCEL and via 077° track to GUCEL and hold.

ATIS 119.675	NAVY KEY WEST APP CON ★ 124.025 313.7	KEY WEST TOWER ★ 118.2 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
-----------------	--	--	------------------	-------------------	------------------

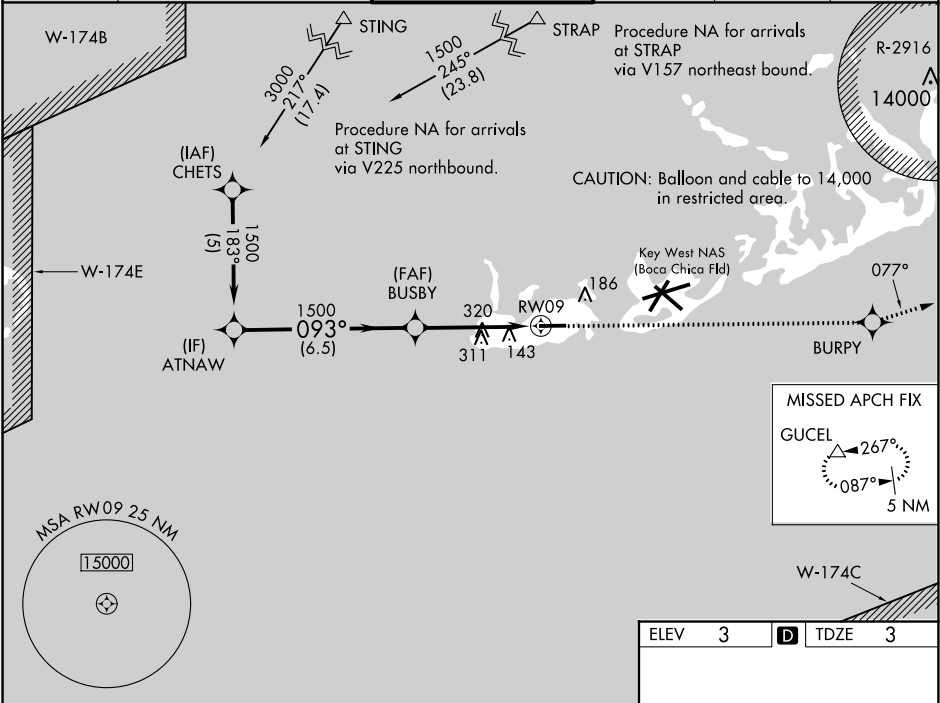

Procedure Turn NA

ATNAW

BUSBY

3000

BURPY

077° tr

GUCEL

1500

093°

1500

RW09

GP 3.00° TCH 35

6.5 NM

4.5 NM

ELEV 3

TDZE 3

093° to RW09

5076 X 100

TWR 79 71

CATEGORY	A	B	C	D
LPV DA	253-1 250 (300-1)			
LNAV/VNAV DA	425-1½ 422 (500-1½)			
LNAV MDA	580-1 577 (600-1)	580-1½ 577 (600-1½)	580-1¾ 577 (600-1¾)	
CIRCLING	580-1 577 (600-1)	580-1½ 577 (600-1½)	620-2 617 (700-2)	

MIRL Rwy 9-27
REIL Rws 9 and 27