



WAAS CH <b>97302</b> <b>W27A</b>	APP CRS <b>275°</b>	Rwy Idg TDZE <b>58</b> Apt Elev <b>83</b>
--	------------------------	---

RNAV (GPS) RWY 27  
TALLAHASSEE INTL (TLH)


RNP APCH. ▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.		ALSF-2 ▲	MISSED APPROACH: Climb to 3000 direct RAGKO and hold.		
ATIS <b>119.45 239.25</b>	TALLAHASSEE APP CON ★ <b>135.8 317.4</b>	TALLAHASSEE TOWER ★ <b>118.7 (CTAF) 0 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>126.65 275.8</b>	UNICOM <b>123.075</b>

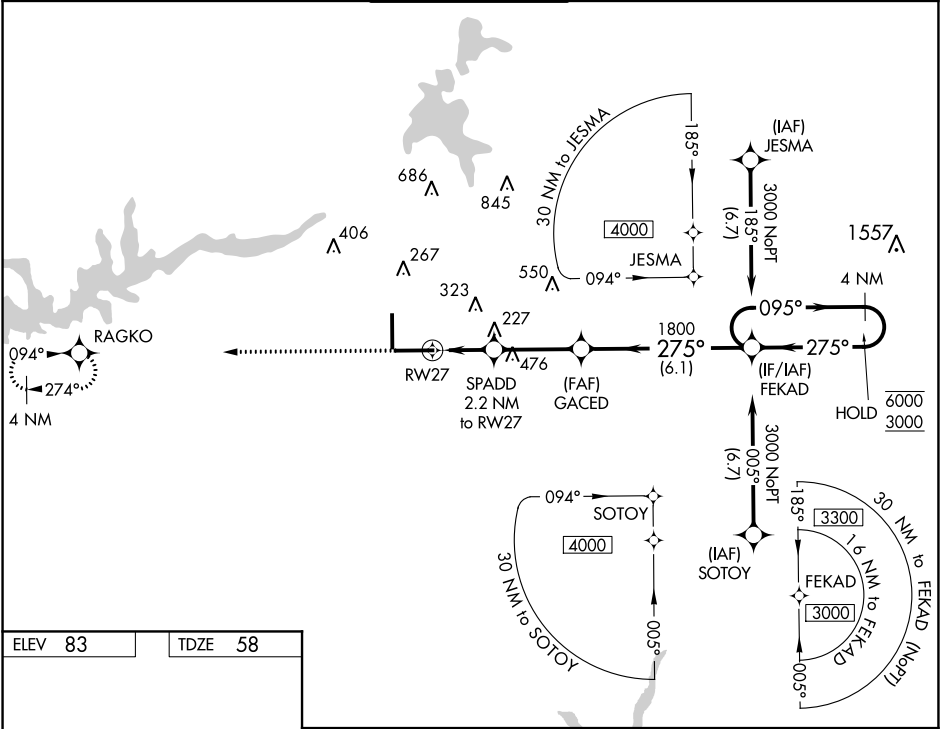

ELEV <b>83</b>	TDZE <b>58</b>
----------------	----------------

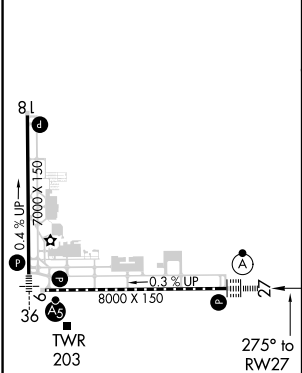

TDZ/CL Rwy 27  
REIL Rwy 9 and 18  
HRL Rwy 9-27 and 18-36

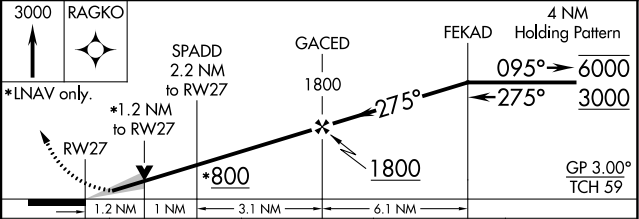

CATEGORY	A	B	C	D
LPV DA	258/18		200 (200-½)	
LNAV/VNAV DA	375/30		317 (300-¾)	
LNAV MDA	480/24	422 (400-½)	480/40	422 (400-¾)
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)