VOR RWY 27

ATHENS/BEN EPPS (AHN)

VOR/DME AHN	APP CRS	Rwy Idg	6122
109.6	262°	TDZE	813
Chan 33		Apt Elev	813

Night landing: Rwy 2, 20 NA. When local altimeter setting not received, use Winder altimeter setting: increase all MDA 60 feet and S-27 Cats C and D visibility to 1⅜ mile, and Circling Cat C visibility to 1⅝ mile, and Cat D to 2¼ mile. VDP NA when using Winder altimeter setting. For inop MALSF increase S-27 Cats A and B visibilty to 1 mile, and Cats C and D to 1⅜ mile. For inop MALSF when using Winder altimeter setting increase S-27 Cats A and B visibility to 1 mile, and Cats C and D to 1⅝ mile.

MALSF

MISSED APPROACH: Climb to 2400 then left turn direct AHN VOR/DME and hold.

ASOS	ATLANTA APP CON ★	ATHENS TOWER ★	GND CON	CLNC DEL	CLNC DEL
132.875	132.475 291.1 316.05	126.3 (CTAF) L 338.275	121.8	121.8	132.475 291.1 316.05 (when twr closed)

UNICOM 122.95

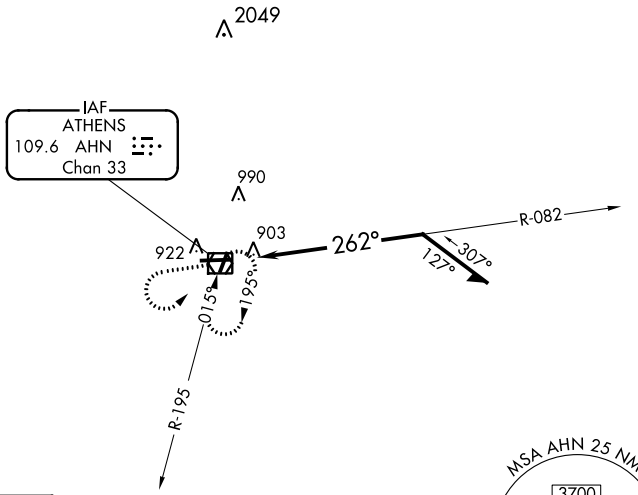



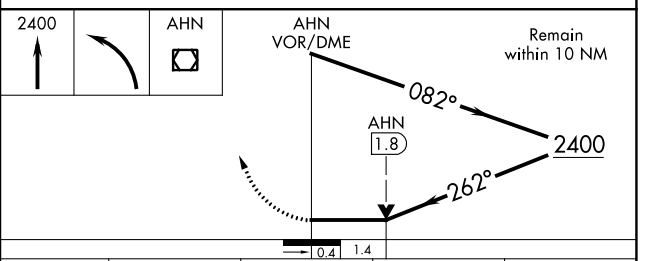

CATEGORY	A	B	C	D
S-27	1300-¾	487 (500-¾)	1300-1⅛	487 (500-1⅛)
C CIRCLING	1300-1	487 (500-1)	1320-1½	1460-2
			507 (600-1½)	647 (700-2)

MIRL Rwy 2-20
MIRL Rwy 9-27 L

SE-4, 31 DEC 2020 to 28 JAN 2021
SE-4, 31 DEC 2020 to 28 JAN 2021