WAAS	APP CRS	Rwy ldg	5010
CH 70538	168°	TDZE	943
W17A		Apt Elev	951

RNAV (GPS) RWY 17

JACKSON COUNTY (JCA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 53°C (128°F). Circling NA for Cat D west of Rwy 17-35. Baro-VNAV and VDP NA when using Winder altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Winder altimeter setting: increase LPV DA to 1310 feet and increase LNAV/VNAV DA to 1363 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C visibility ⅛ mile; increase Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3800 direct KEKTE and hold.

AWOS-3PT	ATLANTA APP CON *	UNICOM
118.125	132.475 291.1	122.8 (CTAF) L

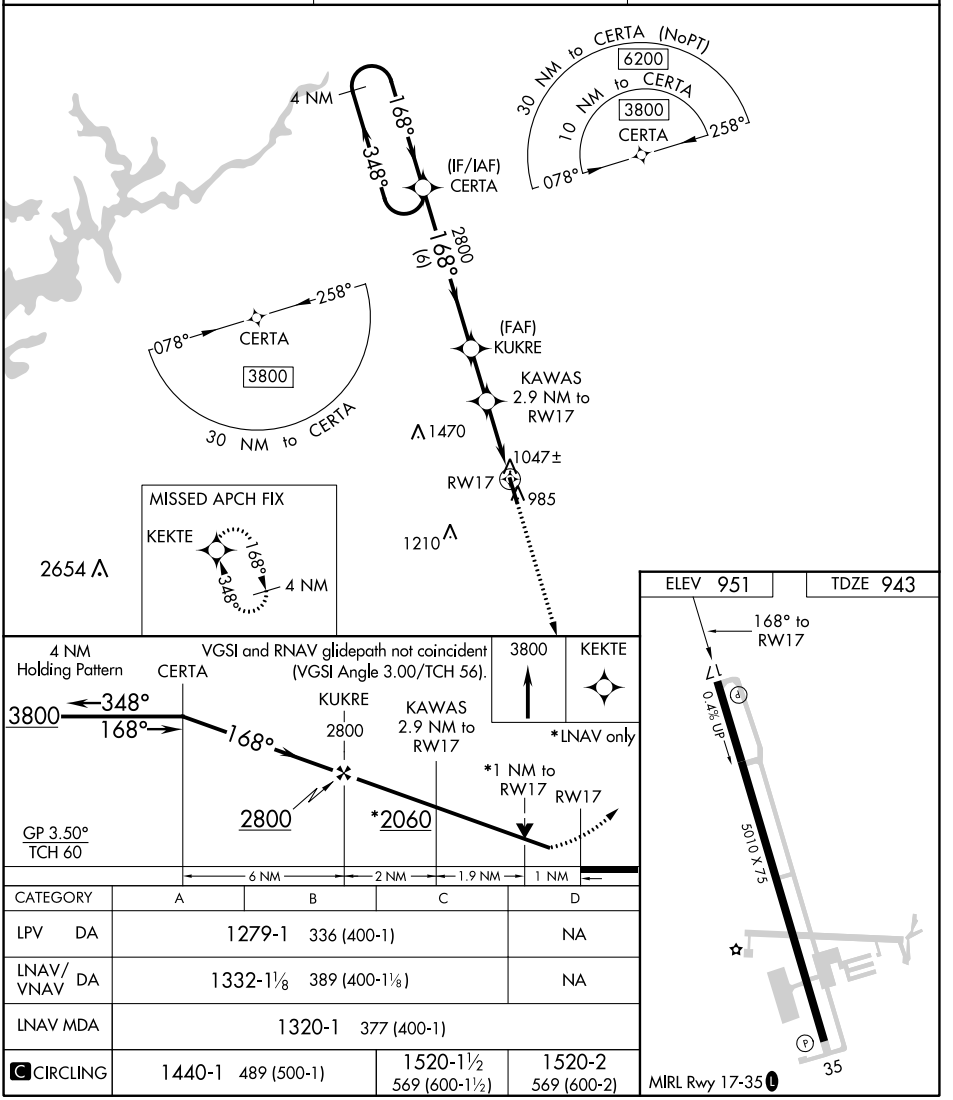

CATEGORY	A	B	C	D
LPV DA	1279-1 336 (400-1)			NA
LNAV/VNAV DA	1332-1⅛ 389 (400-1⅛)			NA
LNAV MDA	1320-1 377 (400-1)			
C CIRCLING	1440-1 489 (500-1)		1520-1½ 569 (600-1½)	1520-2 569 (600-2)

SE-4, 31 DEC 2020 to 28 JAN 2021
SE-4, 31 DEC 2020 to 28 JAN 2021