RNAV (GPS) RWY 32

NEWNAN COWETA COUNTY (CCO)

WAAS CH 77528 W32A	APP CRS 322°	Rwy Idg 5500 TDZE 952 Apt Elev 970

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 46°C. For inop ALS, increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibilities to 1⅛ SM. Rwy 32 helicopter visibility reduction below ¾ SM NA.

MALSF

MISSED APPROACH: Climb to 3500 direct DECEG and hold.

AWOS-3PT	ATLANTA APP CON	CLNC DEL	GCO	UNICOM
118.975	119.8 354.125	119.8	121.725	122.7 (CTAF) L

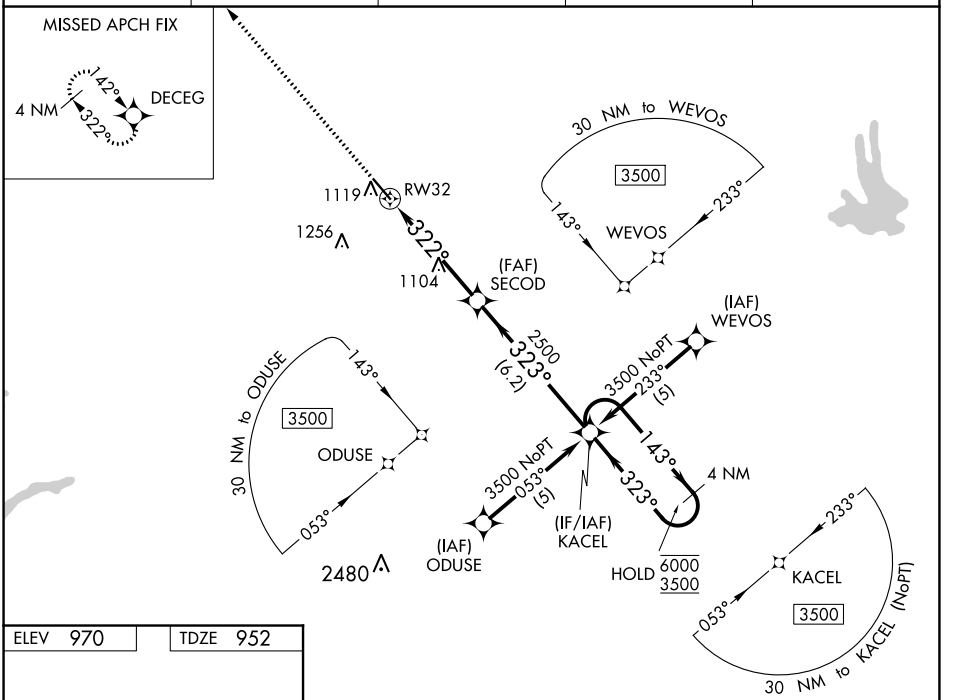

ELEV 970 TDZE 952

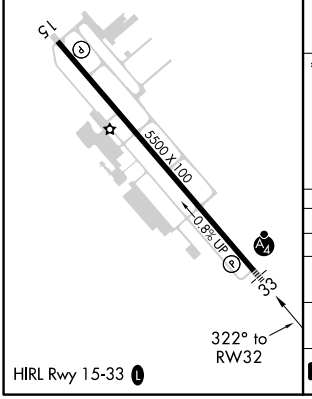

3500 DECEG

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).

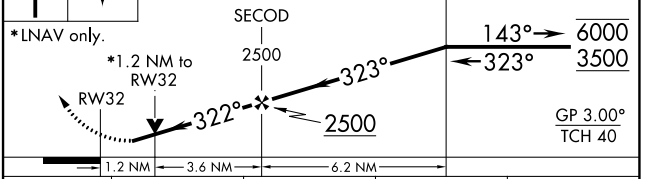

CATEGORY	A	B	C	D
LPV DA	1242-1	290 (300-1)		
LNAV/VNAV DA	1286-1	334 (400-1)		
LNAV MDA	1360-1	408 (400-1)		
C CIRCLING	1420-1 450 (500-1)		1560-1½ 590 (600-1½)	1560-2 590 (600-2)

SE-4, 31 DEC 2020 to 28 JAN 2021
SE-4, 31 DEC 2020 to 28 JAN 2021