

WAAS CH 70419 W22A	APP CRS 222°	Rwy Idg TDZE 4310 Apt Elev 4314
--	------------------------	---

RNAV (GPS) RWY 22


DEMING MUNI (DMN)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 40°C (104°F). Baro-VNAV NA when using Las Cruces altimeter setting.

⚠ When local altimeter setting not received, use Las Cruces altimeter setting and increase all DA 114 feet and all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C and D visibility ½ mile, increase Circling Cat B visibility ½ mile and Circling Cats C and D visibility ½ mile. Rwy 22 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 22 NA at night, Circling Rwy 8, 22 NA at night.

MISSED APPROACH:
Climb to 9000 direct GINEC and on track 274° to FAAST and hold.

ASOS 118.525	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

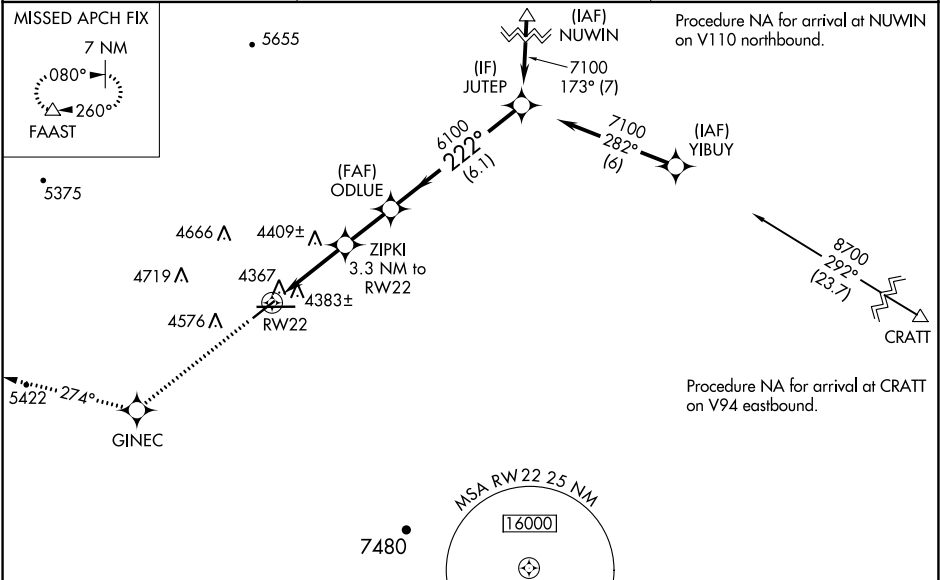

ELEV 4314

TDZE 4310

9000

GINEC

tr 274°

FAAST

ODLUE

JUTEP

* LNAV only.

RW22

ZIPKI

3.3 NM to RW22

6100

222°

7100

Procedure Turn NA

GP 3.00°

TCH 52

5400*

6100

3.3 NM

2.1 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	4560-1			250 (300-1)
LNAV/VNAV DA	4637-1¼			327 (400-1¼)
LNAV MDA	4660-1 350 (400-1)			4660-1¼ 350 (400-1¼)
CIRCLING	4820-1 506 (600-1)	4940-1 626 (700-1)	5020-2 706 (800-2)	5020-2¼ 706 (800-2¼)

MIRL Rwy 4-22

MIRL Rwy 8-26 0