


RNAV (GPS) Y RWY 24
MC CIEHAN-PAIOMAR (CBQ)

- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Rwy 24 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to 1% SM, increase LNAV Cats A/B visibility to RVR 5500 Cat C to 1% SM. Inop table does not apply to LPV.






MISSED APPROACH:
Climb to 2000 direct
IBUGE and hold.

ATIS 120.15	SOCAL APP CON 127.3 323.0	PALOMAR TOWER★ 118.6 (CTAF) 0 276.4	GND CON 121.8	CLNC DEL 134.85
----------------	------------------------------	--	------------------	--------------------

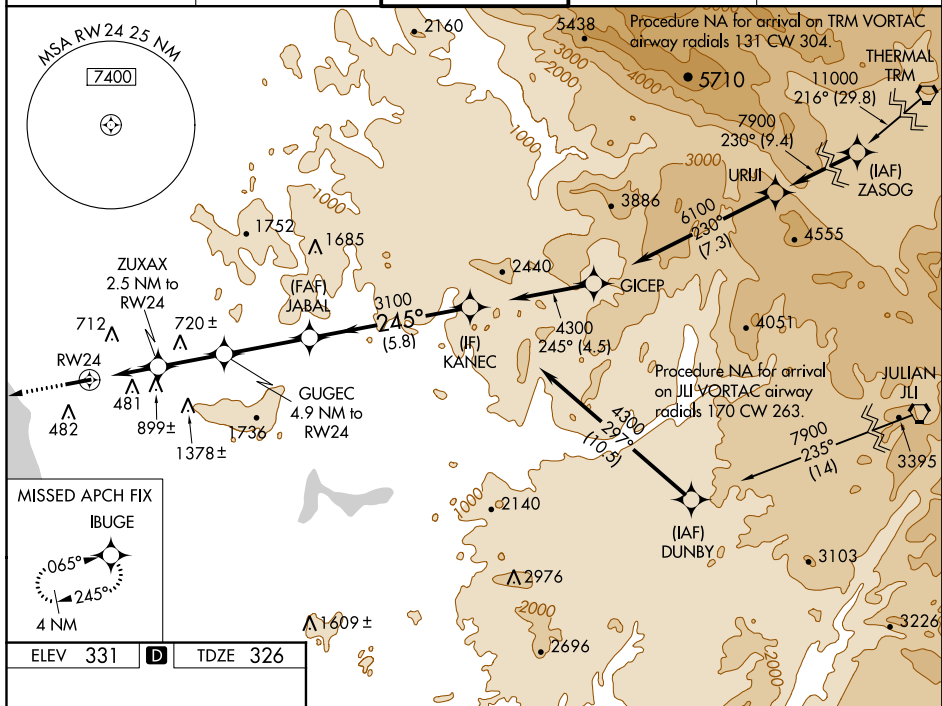

ELEV 331	D	TDZE 326
----------	----------	----------

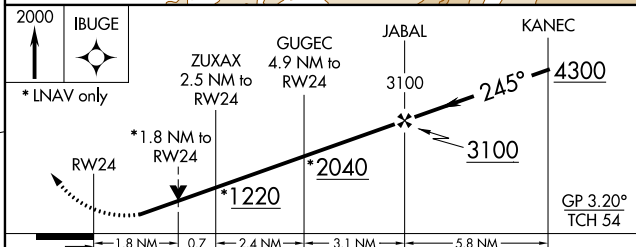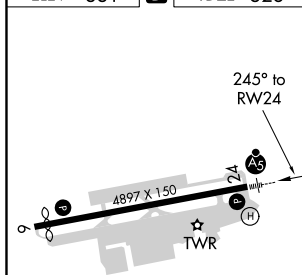

CATEGORY		A	B	C	D
LPV	DA	528/40	202 (200-¾)	576/40 250 (300-¾)	NA
RNAV/ VNAV	DA	927-1½ 601 (600-1½)			NA
RNAV	MDA	1000/40	674 (700-¾)	1000-1½ 674 (700-1½)	NA
 CIRCLING		1000-1 669 (700-1)	1020-1 689 (700-1)	1260-2¾ 929 (1000-2¾)	NA