


WAAS CH 70611 W04B	APP CRS 046°	Rwy Idg 7200 TDZE 260 Apt Elev 266
--	------------------------	---

RNAV (GPS) RWY 4R

BILL AND HILLARY CLINTON NATIONAL/ADAMS FIELD (LIT)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 4R helicopter visibility reduction below ¾ SM NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV Cat A and B visibility to RVR 5000.		MALSR 	MISSED APPROACH: Climb to 2900 direct RIRIW and on track 047° to BRAUM and hold.	
D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95

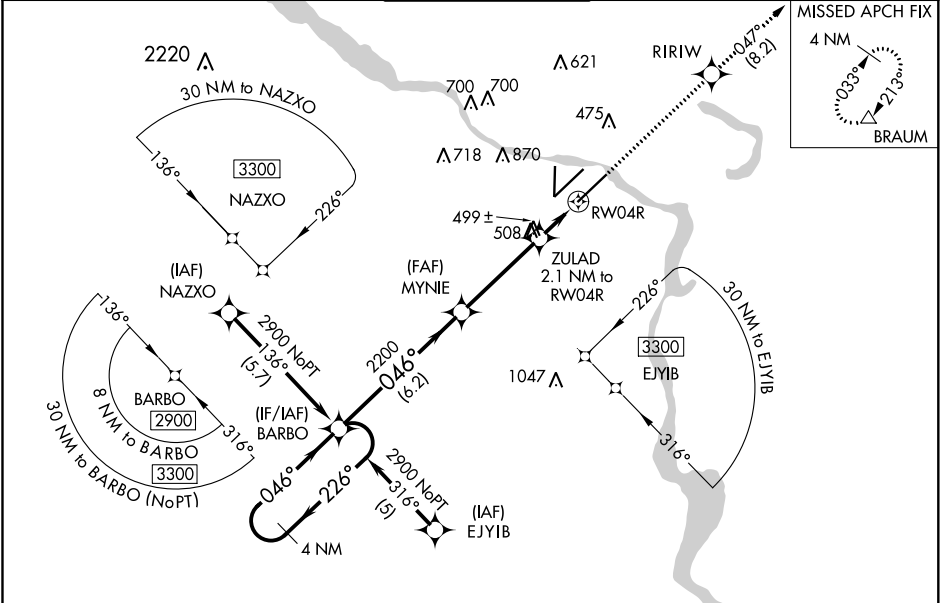

ELEV 266		D TDZE 260	
4 NM Holding Pattern		2900	RIRIW
BARBO		tr	BRAUM
2900 ← 226°		047°	
046° →		*LNAV only.	
GP 3.00°		MYNIE	
TCH 49		ZULAD	
		2.1 NM to RW04R	
		*1.4 NM to RW04R	
		RW04R	
		*960	
		6.2 NM	
		3.7 NM	
		0.7 NM	
		1.4 NM	
CATEGORY	A	B	C
LPV DA	574/40		314 (400-¾)
LNAV/VNAV DA	728/60		468 (500-1¼)
LNAV MDA	760/40	500 (500-¾)	760/50 500 (500-1)
CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)
			1180-3 914 (1000-3)
		TDZ/CL Rwy 22R	
		HIRL Rwy 4R-22L, 4L-22R, and 18-36	

