

WAAS CH 93904 W17A	APP CRS 167°	Rwy Idg 5000 TDZE 1864 Apt Elev 1864
--	------------------------	---





RNAV (GPS) RWY 17
RUSSELL MUNI (RSL)

T Baro-VNAV and VDP NA when using Hays altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hays altimeter setting: increase LPV DA all Cats to 2186 feet, LNAV/VNAV all Cats DA to 2244 feet and all visibilities ¼ mile; increase all MDA 80 feet and LNAV Cat C visibility ¼ mile.

A Circling NA to Rwy's 3 and 21.

MISSED APPROACH:
Climb to 4000 direct
BAQFO and hold.

ASOS 128,325	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

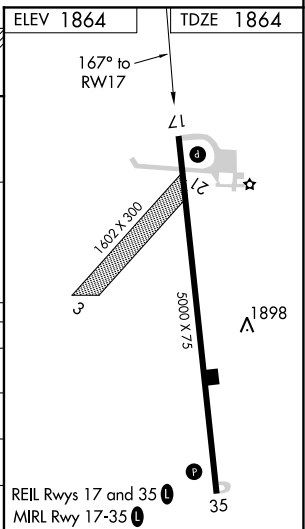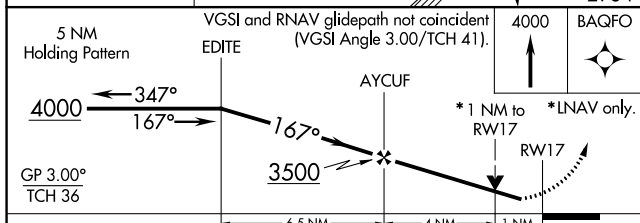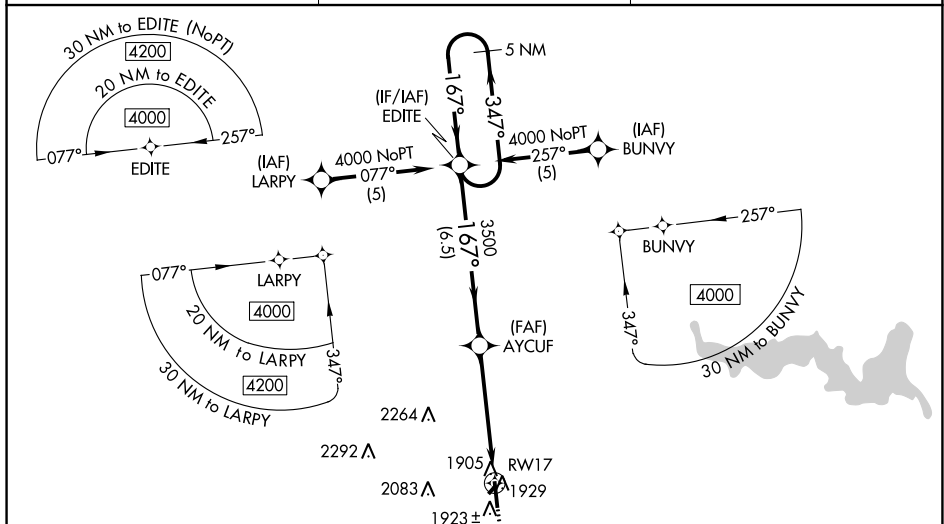

CATEGORY		A		B		C		D	
LPV	DA	2117-1		253 (300-1)				NA	
LNAV/ VNAV	DA	2175-1 $\frac{1}{8}$		311 (400-1 $\frac{1}{2}$)				NA	
LNAV	MDA	2220-1		356 (400-1)				NA	
CIRCLING		2240-1 376 (400-1)		2320-1 456 (500-1)		2320-1 $\frac{1}{2}$ 456 (500-1 $\frac{1}{2}$)		NA	