
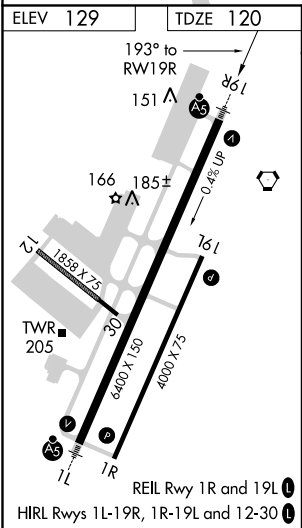
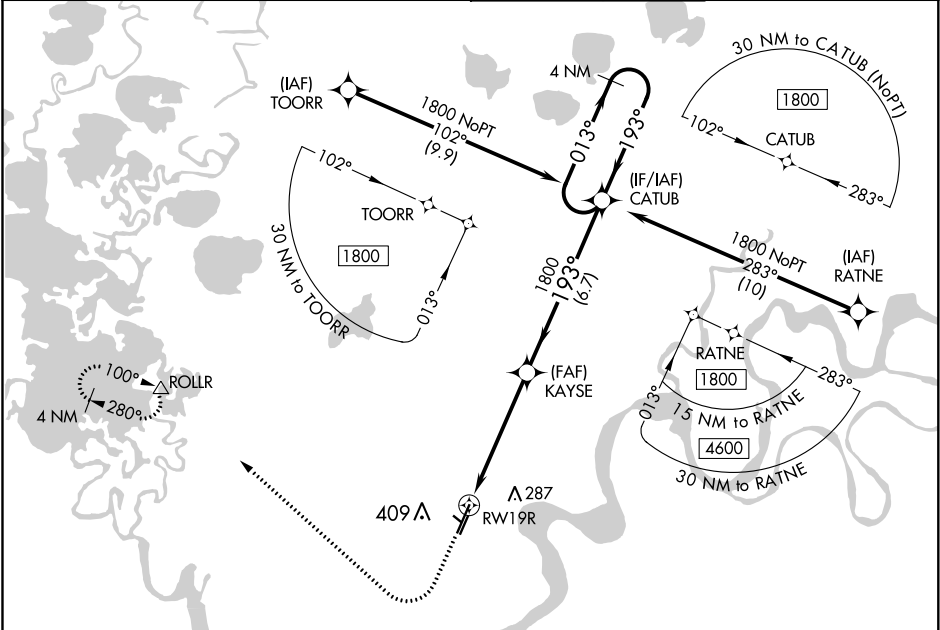


WAAS CH <b>70507</b> <b>W19A</b>	APP CRS <b>193°</b>	Rwy Idg <b>6400</b> TDZE <b>120</b> Apt Elev <b>129</b>
--	------------------------	---

RNAV (GPS) RWY 19R

BETHEL (BET)(PABE)

<div><div>▼</div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.</div></div>	<div><div>MALSR</div><div></div></div>	MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLL and hold.	
ATIS <b>119.8</b>	ANCHORAGE CENTER <b>125.2 372.0</b>	BETHEL TOWER ★ <b>118.7 (CTAF) 0</b>	GND CON <b>121.7</b>



	1700	2000	ROLLR	
* LNAV only				
* 1.3 NM to RWY19R				
GP 3.00° TCH 52				
CATEGORY	A	B	C	D
LPV DA	320/24 200 (200-½)			
LNAV/VNAV DA	479/40 359 (400-¾)			
LNAV MDA	560/24 440 (500-½)		560/45 440 (500-¾)	
CIRCLING	560-1 431 (500-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)