

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>72612</b><br><b>W35A</b> | APP CRS<br><b>350°</b> | Rwy Idg <b>4400</b><br>TDZE <b>769</b><br>Apt Elev <b>769</b> |
|--|------------------------|---|

RNAV (GPS) RWY 35

HANNIBAL RGNL (HAE)


⚠

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).  
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.  
When local altimeter setting not received, use Quincy altimeter setting and increase all DA 41 feet, all MDA 60 feet.  
Baro-VNAV and VDP NA when using Quincy, IL altimeter setting.

MISSED APPROACH: Climb to 3000 direct DORUW and hold.

|                          |  |                                 |
|--------------------------|--|---------------------------------|
| AWOS-3<br><b>120.775</b> | KANSAS CITY CENTER<br><b>126.225 317.775</b> | UNICOM<br><b>122.8 (CTAF) 1</b> |
|--------------------------|--|---------------------------------|

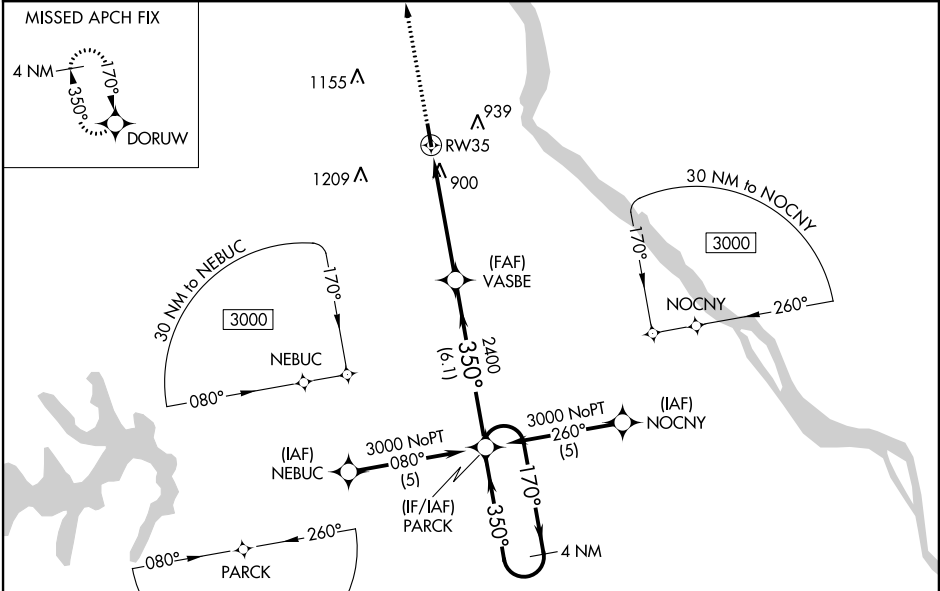

|              |         |                            |    |
|--------------|---------|----------------------------|----|
| 3000 DORUW   |         | PARCK 4 NM Holding Pattern |    |
| *LNAV only   |         | GP 3.00° TCH 40            |    |
| RW35         |         | VASBE                      |    |
| 1.2 NM       |         | 3.7 NM                     |    |
| 1.2 NM       |         | 6.1 NM                     |    |
| CATEGORY     | A       | B                          | D  |
| LPV DA       | 1019-1  | 250 (300-1)                | NA |
| LNAV/VNAV DA | 1242-1¾ | 473 (500-1¾)               | NA |
| LNAV MDA     | 1200-1  | 431 (500-1)                | NA |
| CIRCLING     | 1260-1  | 491 (500-1)                | NA |

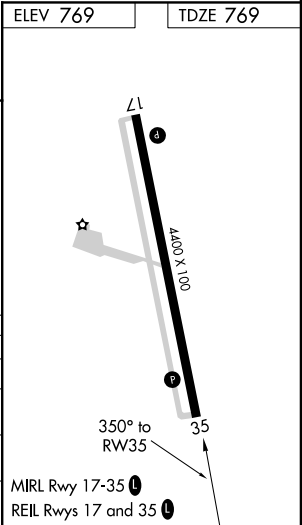

NC-3, 03 DEC 2020 to 31 DEC 2020

NC-3, 03 DEC 2020 to 31 DEC 2020