RNAV (GPS) Y RWY 34

ROANOKE-BLACKSBURG RGNL/WOODRUM FIELD (ROA)

WAAS	APP CRS	Rwy Idg	5810
CH 70722	336°	TDZE	1160
W34A		Apt Elev	1175

RNP APCH.

V A -13°C Circling NA northwest of Rwy 6-24. Rwy 34 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Inop table does not apply to LPV, LNAV/VNAV or LNAV Cat C/D. For inop ALS, increase LPV# all Cats visibility to 1⅛ SM.

MALSR

MISSED APPROACH: (Do not exceed 240K until PROSE) Climb to 2800 then climbing right turn to 6000 direct PROSE and hold, continue climb-in-hold to 6000. # Missed approach requires minimum climb of 405 feet per NM to 3900.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

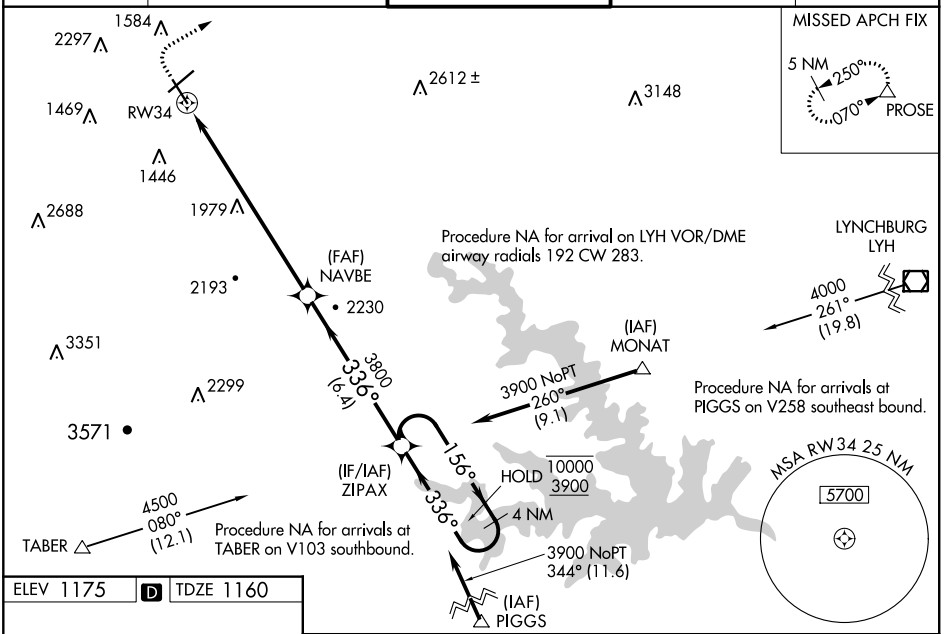

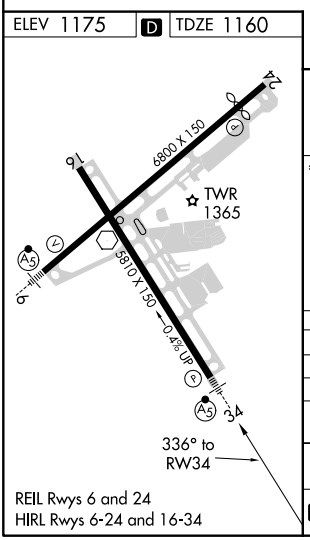

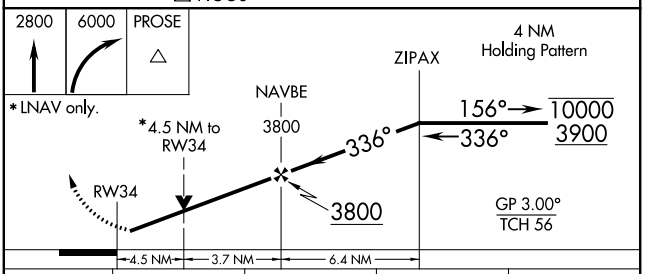

CATEGORY	A	B	C	D
LPV DA#		1560-¾	400 (400-¾)	
LPV DA		2568-5	1408 (1400-5)	
LNAV/VNAV DA		2300-4	1140 (1200-4)	
LNAV MDA	2640-¾ 1480 (1500-¾)	2640-1 1480 (1500-1)	2640-3	1480 (1500-3)
C CIRCLING	2640-1¼ 1465 (1500-1¼)	2640-1½ 1465 (1500-1½)	2640-3 1465 (1500-3)	2820-3 1645 (1700-3)

NE-3, 03 DEC 2020 to 31 DEC 2020
NE-3, 03 DEC 2020 to 31 DEC 2020