

VOR/DME	ATR	APP CRS	Rwy Idg	5331
112.6		234°	TDZE	51
Chan 73			Apt Elev	50

VOR RWY 22

DELAWARE COASTAL (GED)



▼

When local altimeter setting not received, use Salisbury altimeter setting and increase all MDA 60 feet; increase S-22 and Circling Cats C/D visibility ¼ mile; OTBAE fix minimums increase S-22 and Circling Cats C/D visibility ¼ mile. Circling Rwy 10, 28 NA at night.

MISSED APPROACH:

Climb to 800 then climbing left turn to 3000 direct ATR VOR/DME and hold.

ASOS	DOVER APP CON	UNICOM
118.375	132.425 257.875	123.0 (CTAF) 0

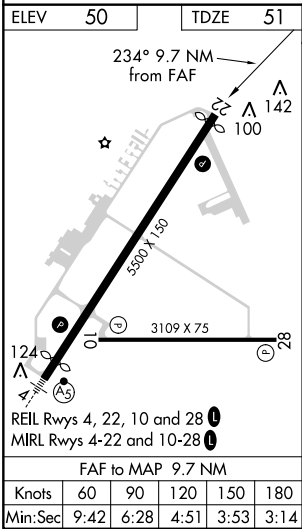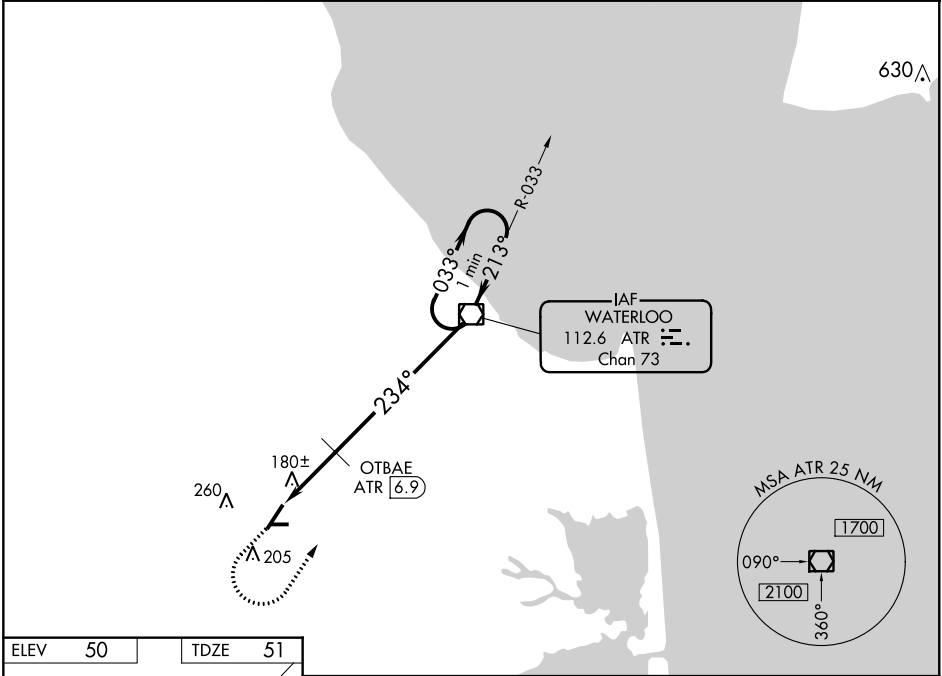

<div>800 3000 ATR</div> <div>One Minute Holding Pattern</div>				
<div>ATR 9.7, OTBAE 6.9, ATR 8.6</div> <div>234° 033° 213° 3000</div> <div>680* 2.83° TCH 52</div> <div>* 740 when using Salisbury altimeter setting.</div>				
CATEGORY	A	B	C	D
S-22	680-1	629 (700-1)	680-1¾	629 (700-1¾)
CIRCLING	680-1	630 (700-1)	720-1¾ 670 (700-1¾)	720-2 670 (700-2)
OTBAE FIX MINIMUMS				
S-22	440-1	389 (400-1)	440-1⅛	389 (400-1⅛)
CIRCLING	560-1 510 (600-1)	580-1 530 (600-1)	720-1¾ 670 (700-1¾)	720-2 670 (700-2)