


TAKEOFF MINIMUMS

Rwys 3, 18, 21, 36: Standard with minimum climb of 500' per NM to 1700.

TOP ALTITUDE:
Assigned by ATC

AWOS-3
119.55
GND CON
121.6
WESTHEIMER TOWER ★
118.0
OKE CITY DEP CON
120.45 288.325

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

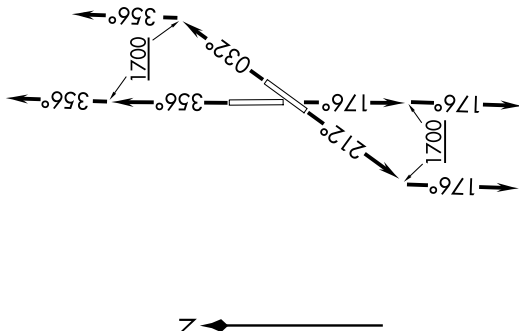

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3: Climb heading 032° to 1700 , then left turn heading 356° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

TAKEOFF RWY 18: Climb heading 176° to 1700 , then heading 176° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

TAKEOFF RWY 21: Climb heading 212° to 1700 , then left turn heading 176° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

TAKEOFF RWY 36: Climb heading 356° to 1700 , then heading 356° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

..... on track 080° to FUNNL, then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

PHARA TRANSITION (FUNNL3.PHARA)