



ATIS  
119.525  
CTAF  
126.975  
CINC DEL  
132.075  
HOUSTON DEP CON  
123.8 257.7

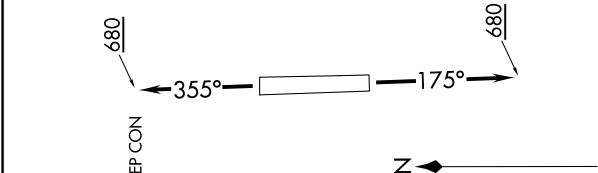

TAKEOFF MINIMUMS

Rwy 18, 36: Standard with minimum climb of 500' per NM to 680.

TOP ALTITUDE:  
ASSIGNED BY ATC

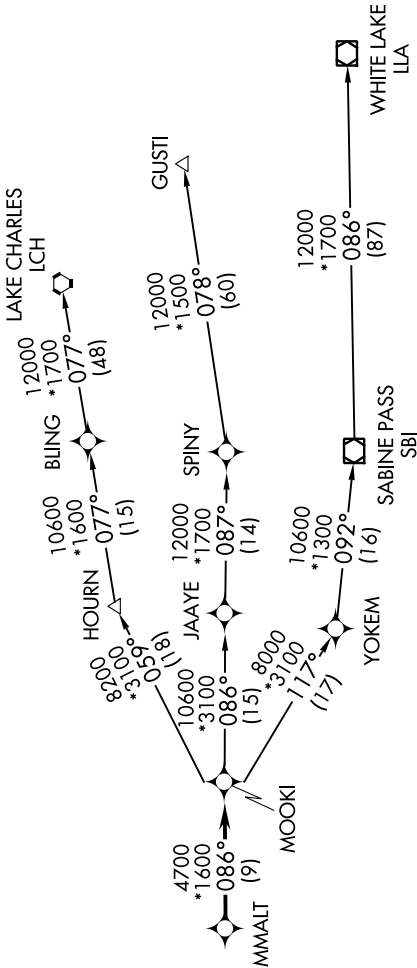

NOTE: DME/DME/IRU or GPS required.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: GUSTI and LCH TRANSITIONS ATC assigned only for aircraft departing AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, T00, T41 and 54T.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 18: Climb on heading 175° to 680 for RADAR vectors to MMALT, thence. . . .  
TAKEOFF RWY 36: Climb on heading 355° to 680 for RADAR vectors to MMALT, thence. . . .

. . . on track 086° to MOOKI, then on (transition). Maintain ATC assigned altitude.  
Expect filed altitude 10 minutes after departure.

GUSTI TRANSITION (MMALT5.GUSTI)  
LAKE CHARLES TRANSITION (MMALT5.LCH)  
WHITE LAKE TRANSITION (MMALT5.LLA)

NOTE: Chart not to scale.